

# Product Manual

Accent 100 Trimless Directional Type 3



# Accent 100 Trimless Directional Type 3





Recessed ceiling luminaire with rotationally symmetrical flood or wide flood optics, high colour reproduction, directional orientation, adjustable depth mechanism for optical assembly. Combine with optical lens and anti-glare accessories for oval, wide spread, or diffuse beam control. High pressure die-cast powdercoated facade with snoot detail. Includes direct fast connector to remote driver. Active power factor correction, current regulation, voltage spike protection.

## System

<b>Power</b>	8W / 7W / 14W
<b>Current</b>	180mA / 350mA
<b>Colour Temperature</b>	2700°K / 3000°K / 4000°K / 2700-1800°K Dim to Warm
<b>Lumen Maintenance</b>	L90 B10 50 000hr
<b>CRI</b>	Ra97
<b>Tm30</b>	R95 F103
<b>Chromacity</b>	<2 SCDM
<b>Articulation</b>	355° Rotation / 0-30° Tilt
<b>Cut-Out</b>	130mm Round x 115-135mm (7W/8W) / 155-175mm (14W) Depth
<b>Ingress Protection</b>	IP20

		<b>FL - 25°</b>	<b>MFL - 40°</b>	<b>WFL - 60°</b>
<b>8W</b>	<b>2700°K</b>	576lm	626lm	624lm
	<b>3000°K</b>	642lm	680lm	672lm
	<b>4000°K</b>	610lm	615lm	650lm
<b>7W</b>	<b>2700-1800°K</b>	454lm	493lm	492lm
<b>14W</b>	<b>2700°K</b>	874lm	863lm	882lm
	<b>3000°K</b>	952lm	931lm	965lm
	<b>4000°K</b>	1044lm	1020lm	1049lm








Accent Trimless

Directional Type 3

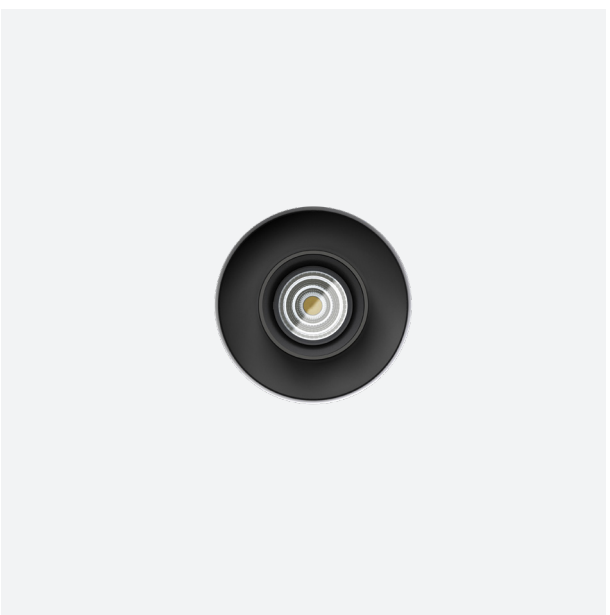

# Model References

	FL - 25°	MFL - 40°	WFL - 60°			
<b>8W 2700°K</b>	100 10 004300.011	100 10 004301.011	100 10 004302.011	○	White	Fixed Output
	100 10 004300.021	100 10 004301.021	100 10 004302.021	●	Black	Fixed Output
	100 10 004300.012	100 10 004301.012	100 10 004302.012	○	White	Phase DIM
	100 10 004300.022	100 10 004301.022	100 10 004302.022	●	Black	Phase DIM
	100 10 004300.013	100 10 004301.013	100 10 004302.013	○	White	DALI
	100 10 004300.023	100 10 004301.023	100 10 004302.023	●	Black	DALI
<b>8W 3000°K</b>	100 10 004303.011	100 10 004304.011	100 10 004305.011	○	White	Fixed Output
	100 10 004303.021	100 10 004304.021	100 10 004305.021	●	Black	Fixed Output
	100 10 004303.012	100 10 004304.012	100 10 004305.012	○	White	Phase DIM
	100 10 004303.022	100 10 004304.022	100 10 004305.022	●	Black	Phase DIM
	100 10 004303.013	100 10 004304.013	100 10 004305.013	○	White	DALI
	100 10 004303.023	100 10 004304.023	100 10 004305.023	●	Black	DALI
<b>8W 4000°K</b>	100 10 004306.011	100 10 004307.011	100 10 004308.011	○	White	Fixed Output
	100 10 004306.021	100 10 004307.021	100 10 004308.021	●	Black	Fixed Output
	100 10 004306.012	100 10 004307.012	100 10 004308.012	○	White	Phase DIM
	100 10 004306.022	100 10 004307.022	100 10 004308.022	●	Black	Phase DIM
	100 10 004306.013	100 10 004307.013	100 10 004308.013	○	White	DALI
	100 10 004306.023	100 10 004307.023	100 10 004308.023	●	Black	DALI
<b>7W 2700-1800°K</b>	100 10 004309.011	100 10 004310.011	100 10 004311.011	○	White	Fixed Output
	100 10 004309.021	100 10 004310.021	100 10 004311.021	●	Black	Fixed Output
	100 10 004309.012	100 10 004310.012	100 10 004311.012	○	White	Phase DIM
	100 10 004309.022	100 10 004310.022	100 10 004311.022	●	Black	Phase DIM
	100 10 004309.013	100 10 004310.013	100 10 004311.013	○	White	DALI
	100 10 004309.023	100 10 004310.023	100 10 004311.023	●	Black	DALI
<b>14W 2700°K</b>	100 10 004312.011	100 10 004313.011	100 10 004314.011	○	White	Fixed Output
	100 10 004312.021	100 10 004313.021	100 10 004314.021	●	Black	Fixed Output
	100 10 004312.012	100 10 004313.012	100 10 004314.012	○	White	Phase DIM
	100 10 004312.022	100 10 004313.022	100 10 004314.022	●	Black	Phase DIM
	100 10 004312.013	100 10 004313.013	100 10 004314.013	○	White	DALI
	100 10 004312.023	100 10 004313.023	100 10 004314.023	●	Black	DALI
<b>14W 3000°K</b>	100 10 004315.011	100 10 004316.011	100 10 004317.011	○	White	Fixed Output
	100 10 004315.021	100 10 004316.021	100 10 004317.021	●	Black	Fixed Output
	100 10 004315.012	100 10 004316.012	100 10 004317.012	○	White	Phase DIM
	100 10 004315.022	100 10 004316.022	100 10 004317.022	●	Black	Phase DIM
	100 10 004315.013	100 10 004316.013	100 10 004317.013	○	White	DALI
	100 10 004315.023	100 10 004316.023	100 10 004317.023	●	Black	DALI
<b>14W 4000°K</b>	100 10 004318.011	100 10 004319.011	100 10 004320.011	○	White	Fixed Output
	100 10 004318.021	100 10 004319.021	100 10 004320.021	●	Black	Fixed Output
	100 10 004318.012	100 10 004319.012	100 10 004320.012	○	White	Phase DIM
	100 10 004318.022	100 10 004319.022	100 10 004320.022	●	Black	Phase DIM
	100 10 004318.013	100 10 004319.013	100 10 004320.013	○	White	DALI
	100 10 004318.023	100 10 004319.023	100 10 004320.023	●	Black	DALI
<b>Accessories</b>	980 00 004301.010	Hex Louvre 043				
	980 00 004302.000	Spreader Lens 043				
	980 00 004303.000	Linear Spreader Lens 043				
	980 00 004304.000	Diffuser Lens 043				

iilus.com