

# Product Manual

Accent 100 Trimless Asymmetrical Type 2





# Accent 100 Trimless Asymmetrical Type 2

Recessed ceiling luminaire with rotationally symmetrical flood or wide flood optics, high colour reproduction, asymmetrical orientation, adjustable depth mechanism for optical assembly. Combine with optical lens and anti-glare accessories for oval, wide spread, or diffuse beam control. High pressure die-cast powdercoated facade with rounded detail. Includes direct fast connector to remote driver. Active power factor correction, current regulation, voltage spike protection.

## System

<b>Power</b>	8W / 7W / 14W
<b>Current</b>	180mA / 350mA
<b>Colour Temperature</b>	2700°K / 3000°K / 4000°K / 2700-1800°K Dim to Warm
<b>Lumen Maintenance</b>	L90 B10 50 000hr
<b>CRI</b>	Ra97
<b>Tm30</b>	R95 F103
<b>Chromacity</b>	<2 SCDM
<b>Articulation</b>	355° Rotation / 30° Fixed Tilt
<b>Cut-Out</b>	130mm Round x 115-135mm (7W/8W) / 155-175mm (14W) Depth
<b>Ingress Protection</b>	IP20

		<b>FL - 25°</b>	<b>MFL - 40°</b>	<b>WFL - 60°</b>
<b>8W</b>	<b>2700°K</b>	576lm	626lm	624lm
	<b>3000°K</b>	642lm	680lm	672lm
	<b>4000°K</b>	610lm	615lm	650lm
<b>7W</b>	<b>2700-1800°K</b>	454lm	493lm	492lm
<b>14W</b>	<b>2700°K</b>	874lm	863lm	882lm
	<b>3000°K</b>	952lm	931lm	965lm
	<b>4000°K</b>	1044lm	1020lm	1049lm








Accent Trimless

Asymmetrical Type 2

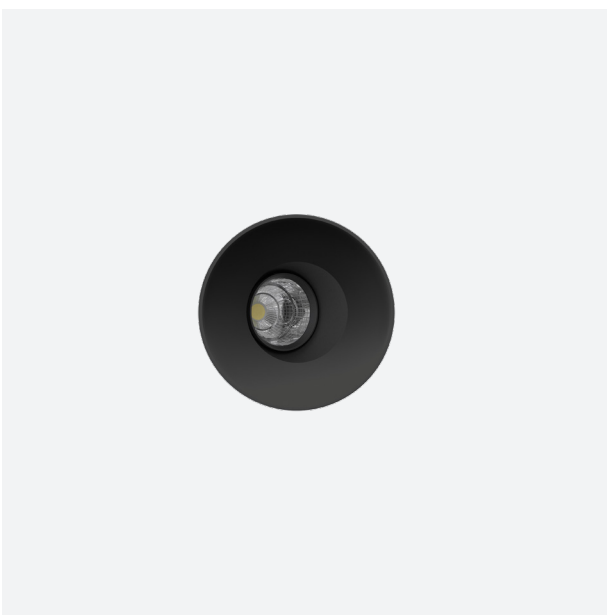

Page — 04

# Model References

	FL - 25°	MFL - 40°	WFL - 60°			
<b>8W 2700°K</b>	100 10 005200.011	100 10 005201.011	100 10 005202.011	○	White	Fixed Output
	100 10 005200.021	100 10 005201.021	100 10 005202.021	●	Black	Fixed Output
	100 10 005200.012	100 10 005201.012	100 10 005202.012	○	White	Phase DIM
	100 10 005200.022	100 10 005201.022	100 10 005202.022	●	Black	Phase DIM
	100 10 005200.013	100 10 005201.013	100 10 005202.013	○	White	DALI
	100 10 005200.023	100 10 005201.023	100 10 005202.023	●	Black	DALI
<b>8W 3000°K</b>	100 10 005203.011	100 10 005204.011	100 10 005205.011	○	White	Fixed Output
	100 10 005203.021	100 10 005204.021	100 10 005205.021	●	Black	Fixed Output
	100 10 005203.012	100 10 005204.012	100 10 005205.012	○	White	Phase DIM
	100 10 005203.022	100 10 005204.022	100 10 005205.022	●	Black	Phase DIM
	100 10 005203.013	100 10 005204.013	100 10 005205.013	○	White	DALI
	100 10 005203.023	100 10 005204.023	100 10 005205.023	●	Black	DALI
<b>8W 4000°K</b>	100 10 005206.011	100 10 005207.011	100 10 005208.011	○	White	Fixed Output
	100 10 005206.021	100 10 005207.021	100 10 005208.021	●	Black	Fixed Output
	100 10 005206.012	100 10 005207.012	100 10 005208.012	○	White	Phase DIM
	100 10 005206.022	100 10 005207.022	100 10 005208.022	●	Black	Phase DIM
	100 10 005206.013	100 10 005207.013	100 10 005208.013	○	White	DALI
	100 10 005206.023	100 10 005207.023	100 10 005208.023	●	Black	DALI
<b>7W 2700-1800°K</b>	100 10 005209.011	100 10 005210.011	100 10 005211.011	○	White	Fixed Output
	100 10 005209.021	100 10 005210.021	100 10 005211.021	●	Black	Fixed Output
	100 10 005209.012	100 10 005210.012	100 10 005211.012	○	White	Phase DIM
	100 10 005209.022	100 10 005210.022	100 10 005211.022	●	Black	Phase DIM
	100 10 005209.013	100 10 005210.013	100 10 005211.013	○	White	DALI
	100 10 005209.023	100 10 005210.023	100 10 005211.023	●	Black	DALI
<b>14W 2700°K</b>	100 10 005212.011	100 10 005213.011	100 10 005214.011	○	White	Fixed Output
	100 10 005212.021	100 10 005213.021	100 10 005214.021	●	Black	Fixed Output
	100 10 005212.012	100 10 005213.012	100 10 005214.012	○	White	Phase DIM
	100 10 005212.022	100 10 005213.022	100 10 005214.022	●	Black	Phase DIM
	100 10 005212.013	100 10 005213.013	100 10 005214.013	○	White	DALI
	100 10 005212.023	100 10 005213.023	100 10 005214.023	●	Black	DALI
<b>14W 3000°K</b>	100 10 005215.011	100 10 005216.011	100 10 005217.011	○	White	Fixed Output
	100 10 005215.021	100 10 005216.021	100 10 005217.021	●	Black	Fixed Output
	100 10 005215.012	100 10 005216.012	100 10 005217.012	○	White	Phase DIM
	100 10 005215.022	100 10 005216.022	100 10 005217.022	●	Black	Phase DIM
	100 10 005215.013	100 10 005216.013	100 10 005217.013	○	White	DALI
	100 10 005215.023	100 10 005216.023	100 10 005217.023	●	Black	DALI
<b>14W 4000°K</b>	100 10 005218.011	100 10 005219.011	100 10 005220.011	○	White	Fixed Output
	100 10 005218.021	100 10 005219.021	100 10 005220.021	●	Black	Fixed Output
	100 10 005218.012	100 10 005219.012	100 10 005220.012	○	White	Phase DIM
	100 10 005218.022	100 10 005219.022	100 10 005220.022	●	Black	Phase DIM
	100 10 005218.013	100 10 005219.013	100 10 005220.013	○	White	DALI
	100 10 005218.023	100 10 005219.023	100 10 005220.023	●	Black	DALI
<b>Accessories</b>	980 00 004301.010	Hex Louvre 043				
	980 00 004302.000	Spreader Lens 043				
	980 00 004303.000	Linear Spreader Lens 043				
	980 00 004304.000	Diffuser Lens 043				

iilus.com