

# Product Manual

Accent 100 Trimless Concrete Asymmetrical Type 2



# Accent 100 Trimless Concrete

## Asymmetrical Type 2





Recessed ceiling luminaire for use in concrete slab with rotationally symmetrical flood or wide flood optics, high colour reproduction, Asymmetrical fixed orientation, adjustable depth mechanism for optical assembly. Combine with optical lens and anti-glare accessories for oval, wide spread, or diffuse beam control. High pressure die-cast powdercoated facade with rounded detail. Includes direct fast connector to remote driver. Active power factor correction, current regulation, voltage spike protection.

### System

<b>Power</b>	8W / 7W / 14W
<b>Current</b>	180mA / 350mA
<b>Colour Temperature</b>	2700°K / 3000°K / 4000°K / 2700-1800°K Dim to Warm
<b>Lumen Maintenance</b>	L90 B10 50 000hr
<b>CRI</b>	Ra97
<b>Tm30</b>	R95 F103
<b>Chromacity</b>	<2 SCDM
<b>Articulation</b>	355° Rotation / 30° Fixed Tilt
<b>Cut-Out</b>	182mm Round x 125-190mm Depth
<b>Ingress Protection</b>	IP20

		<b>FL - 25°</b>	<b>MFL - 40°</b>	<b>WFL - 60°</b>
<b>8W</b>	<b>2700°K</b>	576lm	626lm	624lm
	<b>3000°K</b>	642lm	680lm	672lm
	<b>4000°K</b>	610lm	615lm	650lm
<b>7W</b>	<b>2700-1800°K</b>	454lm	493lm	492lm
<b>14W</b>	<b>2700°K</b>	874lm	863lm	882lm
	<b>3000°K</b>	952lm	931lm	965lm
	<b>4000°K</b>	1044lm	1020lm	1049lm



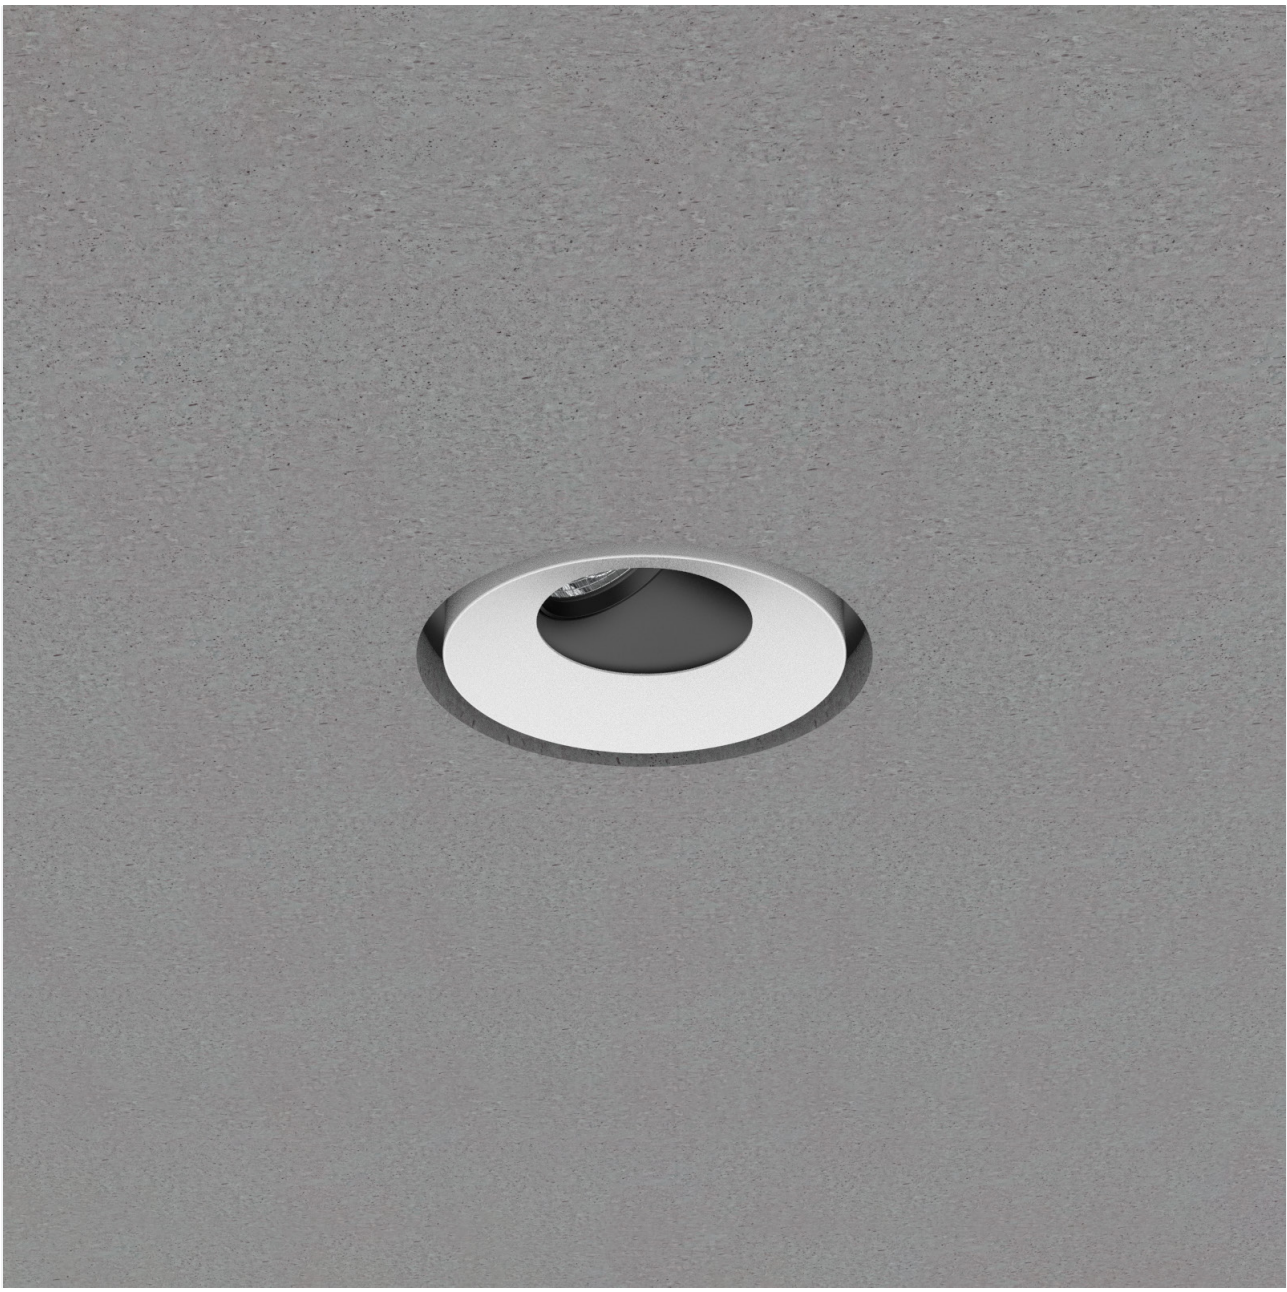



# Accent 100 Trimless Concrete Asymmetrical Type 2

	FL - 25°	MFL - 40°	WFL - 60°			
<b>8W 2700°K</b>	100 10 014200.011	100 10 014201.011	100 10 014202.011	○	White	Fixed Output
	100 10 014200.021	100 10 014201.021	100 10 014202.021	●	Black	Fixed Output
	100 10 014200.012	100 10 014201.012	100 10 014202.012	○	White	Phase DIM
	100 10 014200.022	100 10 014201.022	100 10 014202.022	●	Black	Phase DIM
	100 10 014200.013	100 10 014201.013	100 10 014202.013	○	White	DALI
	100 10 014200.023	100 10 014201.023	100 10 014202.023	●	Black	DALI
<b>8W 3000°K</b>	100 10 014203.011	100 10 014204.011	100 10 014205.011	○	White	Fixed Output
	100 10 014203.021	100 10 014204.021	100 10 014205.021	●	Black	Fixed Output
	100 10 014203.012	100 10 014204.012	100 10 014205.012	○	White	Phase DIM
	100 10 014203.022	100 10 014204.022	100 10 014205.022	●	Black	Phase DIM
	100 10 014203.013	100 10 014204.013	100 10 014205.013	○	White	DALI
	100 10 014203.023	100 10 014204.023	100 10 014205.023	●	Black	DALI
<b>8W 4000°K</b>	100 10 014206.011	100 10 014207.011	100 10 014208.011	○	White	Fixed Output
	100 10 014206.021	100 10 014207.021	100 10 014208.021	●	Black	Fixed Output
	100 10 014206.012	100 10 014207.012	100 10 014208.012	○	White	Phase DIM
	100 10 014206.022	100 10 014207.022	100 10 014208.022	●	Black	Phase DIM
	100 10 014206.013	100 10 014207.013	100 10 014208.013	○	White	DALI
	100 10 014206.023	100 10 014207.023	100 10 014208.023	●	Black	DALI
<b>7W 2700-1800°K</b>	100 10 014209.011	100 10 014210.011	100 10 014211.011	○	White	Fixed Output
	100 10 014209.021	100 10 014210.021	100 10 014211.021	●	Black	Fixed Output
	100 10 014209.012	100 10 014210.012	100 10 014211.012	○	White	Phase DIM
	100 10 014209.022	100 10 014210.022	100 10 014211.022	●	Black	Phase DIM
	100 10 014209.013	100 10 014210.013	100 10 014211.013	○	White	DALI
	100 10 014209.023	100 10 014210.023	100 10 014211.023	●	Black	DALI
<b>14W 2700°K</b>	100 10 014212.011	100 10 014213.011	100 10 014214.011	○	White	Fixed Output
	100 10 014212.021	100 10 014213.021	100 10 014214.021	●	Black	Fixed Output
	100 10 014212.012	100 10 014213.012	100 10 014214.012	○	White	Phase DIM
	100 10 014212.022	100 10 014213.022	100 10 014214.022	●	Black	Phase DIM
	100 10 014212.013	100 10 014213.013	100 10 014214.013	○	White	DALI
	100 10 014212.023	100 10 014213.023	100 10 014202.023	●	Black	DALI
<b>14W 3000°K</b>	100 10 014215.011	100 10 014216.011	100 10 014217.011	○	White	Fixed Output
	100 10 014215.021	100 10 014216.021	100 10 014217.021	●	Black	Fixed Output
	100 10 014215.012	100 10 014216.012	100 10 014217.012	○	White	Phase DIM
	100 10 014215.022	100 10 014216.022	100 10 014217.022	●	Black	Phase DIM
	100 10 014215.013	100 10 014216.013	100 10 014217.013	○	White	DALI
	100 10 014215.023	100 10 014216.023	100 10 014217.023	●	Black	DALI
<b>14W 4000°K</b>	100 10 014218.011	100 10 014219.011	100 10 014220.011	○	White	Fixed Output
	100 10 014218.021	100 10 014219.021	100 10 014220.021	●	Black	Fixed Output
	100 10 014218.012	100 10 014219.012	100 10 014220.012	○	White	Phase DIM
	100 10 014218.022	100 10 014219.022	100 10 014220.022	●	Black	Phase DIM
	100 10 014218.013	100 10 014219.013	100 10 014220.013	○	White	DALI
	100 10 014218.023	100 10 014219.023	100 10 014220.023	●	Black	DALI
<b>Accessories</b>	980 00 004301.010	Hex Louvre 043				
	980 00 004302.000	Spreader Lens 043				
	980 00 004303.000	Linear Spreader Lens 043				
	980 00 004304.000	Diffuser Lens 043				

[iilus.com](http://iilus.com)