

# Product Manual

Accent 100 IP Trimless Concrete Directional Type 3



# Accent 100 IP Trimless Concrete

## Directional Type 3





Recessed ceiling luminaire for use in concrete slab with rotationally symmetrical flood or wide flood optics, high colour reproduction, directional orientation, adjustable depth mechanism for optical assembly. Combine with optical lens and anti-glare accessories for oval, wide spread, or diffuse beam control. High pressure die-cast powdercoated facade from marine-grade base material and nano-ceramic pre-treatment with snoot detail. Includes direct fast connector to remote driver. Active power factor correction, current regulation, voltage spike protection.

### System

<b>Power</b>	8W / 7W / 14W
<b>Current</b>	180mA / 350mA
<b>Colour Temperature</b>	2700°K / 3000°K / 4000°K / 2700-1800°K Dim to Warm
<b>Lumen Maintenance</b>	L90 B10 50 000hr
<b>CRI</b>	Ra97
<b>Tm30</b>	R95 F103
<b>Chromacity</b>	<2 SCDM
<b>Articulation</b>	355° Rotation / 30° Tilt
<b>Cavity</b>	182mm Round x 125-190mm Depth
<b>Ingress Protection</b>	IP44

		<b>FL - 25°</b>	<b>MFL - 40°</b>	<b>WFL - 60°</b>
<b>8W</b>	<b>2700°K</b>	576lm	626lm	624lm
	<b>3000°K</b>	642lm	680lm	672lm
	<b>4000°K</b>	610lm	615lm	650lm
<b>7W</b>	<b>2700-1800°K</b>	454lm	493lm	492lm
<b>14W</b>	<b>2700°K</b>	874lm	863lm	882lm
	<b>3000°K</b>	952lm	931lm	965lm
	<b>4000°K</b>	1044lm	1020lm	1049lm



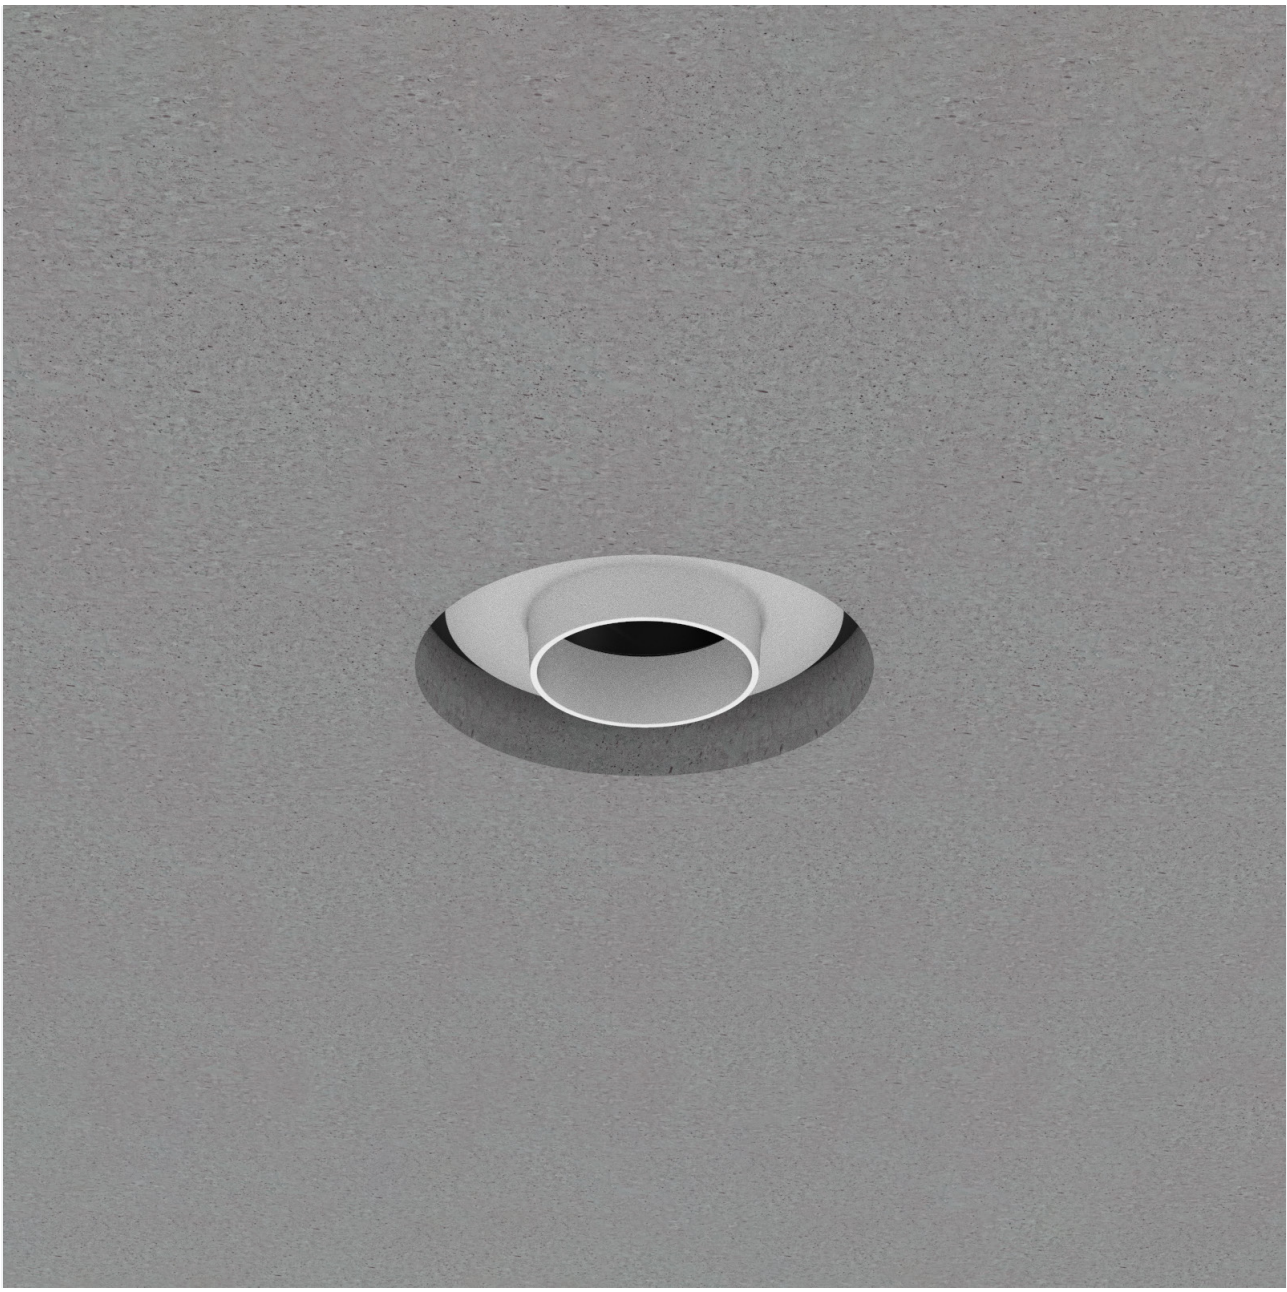



# Accent 100 IP Trimless Concrete

## Directional Type 3

	FL - 25°	MFL - 40°	WFL - 60°			
<b>8W 2700°K</b>	100 10 016300.011	100 10 016301.011	100 10 016302.011	○	White	Fixed Output
	100 10 016300.021	100 10 016301.021	100 10 016302.021	●	Black	Fixed Output
	100 10 016300.012	100 10 016301.012	100 10 016302.012	○	White	Phase DIM
	100 10 016300.022	100 10 016301.022	100 10 016302.022	●	Black	Phase DIM
	100 10 016300.013	100 10 016301.013	100 10 016302.013	○	White	DALI
	100 10 016300.023	100 10 016301.023	100 10 016302.023	●	Black	DALI
<b>8W 3000°K</b>	100 10 016303.011	100 10 016304.011	100 10 016305.011	○	White	Fixed Output
	100 10 016303.021	100 10 016304.021	100 10 016305.021	●	Black	Fixed Output
	100 10 016303.012	100 10 016304.012	100 10 016305.012	○	White	Phase DIM
	100 10 016303.022	100 10 016304.022	100 10 016305.022	●	Black	Phase DIM
	100 10 016303.013	100 10 016304.013	100 10 016305.013	○	White	DALI
	100 10 016303.023	100 10 016304.023	100 10 016305.023	●	Black	DALI
<b>8W 4000°K</b>	100 10 016306.011	100 10 016307.011	100 10 016308.011	○	White	Fixed Output
	100 10 016306.021	100 10 016307.021	100 10 016308.021	●	Black	Fixed Output
	100 10 016306.012	100 10 016307.012	100 10 016308.012	○	White	Phase DIM
	100 10 016306.022	100 10 016307.022	100 10 016308.022	●	Black	Phase DIM
	100 10 016306.013	100 10 016307.013	100 10 016308.013	○	White	DALI
	100 10 016306.023	100 10 016307.023	100 10 016308.023	●	Black	DALI
<b>7W 2700-1800°K</b>	100 10 016309.011	100 10 016310.011	100 10 016311.011	○	White	Fixed Output
	100 10 016309.021	100 10 016310.021	100 10 016311.021	●	Black	Fixed Output
	100 10 016309.012	100 10 016310.012	100 10 016311.012	○	White	Phase DIM
	100 10 016309.022	100 10 016310.022	100 10 016311.022	●	Black	Phase DIM
	100 10 016309.013	100 10 016310.013	100 10 016311.013	○	White	DALI
	100 10 016309.023	100 10 016310.023	100 10 016311.023	●	Black	DALI
<b>14W 2700°K</b>	100 10 016312.011	100 10 016313.011	100 10 016314.011	○	White	Fixed Output
	100 10 016312.021	100 10 016313.021	100 10 016314.021	●	Black	Fixed Output
	100 10 016312.012	100 10 016313.012	100 10 016314.012	○	White	Phase DIM
	100 10 016312.022	100 10 016313.022	100 10 016314.022	●	Black	Phase DIM
	100 10 016312.013	100 10 016313.013	100 10 016314.013	○	White	DALI
	100 10 016312.023	100 10 016313.023	100 10 016314.023	●	Black	DALI
<b>14W 3000°K</b>	100 10 016315.011	100 10 016316.011	100 10 016317.011	○	White	Fixed Output
	100 10 016315.021	100 10 016316.021	100 10 016317.021	●	Black	Fixed Output
	100 10 016315.012	100 10 016316.012	100 10 016317.012	○	White	Phase DIM
	100 10 016315.022	100 10 016316.022	100 10 016317.022	●	Black	Phase DIM
	100 10 016315.013	100 10 016316.013	100 10 016317.013	○	White	DALI
	100 10 016315.023	100 10 016316.023	100 10 016317.023	●	Black	DALI
<b>14W 4000°K</b>	100 10 016318.011	100 10 016319.011	100 10 016320.011	○	White	Fixed Output
	100 10 016318.021	100 10 016319.021	100 10 016320.021	●	Black	Fixed Output
	100 10 016318.012	100 10 016319.012	100 10 016320.012	○	White	Phase DIM
	100 10 016318.022	100 10 016319.022	100 10 016320.022	●	Black	Phase DIM
	100 10 016318.013	100 10 016319.013	100 10 016320.013	○	White	DALI
	100 10 016318.023	100 10 016319.023	100 10 016320.023	●	Black	DALI
<b>Accessories</b>	980 00 004301.010	Hex Louvre 043				
	980 00 004302.000	Spreader Lens 043				
	980 00 004303.000	Linear Spreader Lens 043				
	980 00 004304.000	Diffuser Lens 043				

iilus.com