

Product Manual

Mono 060 Recessed Downlighter Type 1



Mono 060 Recessed Type 1




Recessed ceiling luminaire with rotationally symmetrical medium, flood or wide flood optics, high colour reproduction, fixed orientation. High pressure die-cast powdercoated facade with inset detail and shallow recess depth. Includes direct fast connector to remote driver. Active power factor correction, current regulation, voltage spike protection.


System

Power	8W
Current	180mA
Colour Temperature	2700°K / 3000°K / 4000°K / 2700-1800°K
Lumen Maintenance	L90 B10 50 000hr
CRI	Ra97
Tm30	R95 F103
Chromacity	<3 SCDM
Articulation	Fixed
Cut-Out	54mm Round x 80mm Depth
Ingress Protection	IP44

	FL - 25°	MFL - 40°	WFL - 60°
2700°K	576lm	626lm	624lm
3000°K	642lm	680lm	672lm
4000°K	610lm	615lm	650lm

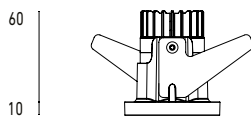

64

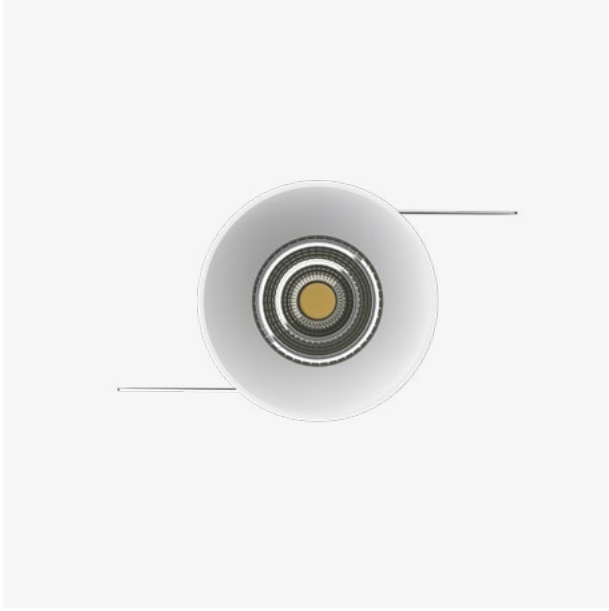



Model References

	FL - 25°	MFL - 40°	WFL - 60°		
2700°K	101 06 000100.011	101 06 000101.011	101 06 000102.011	White	Fixed Output
	101 06 000100.021	101 06 000101.021	101 06 000102.021	Black	Fixed Output
	101 06 000100.012	101 06 000101.012	101 06 000102.012	White	Phase DIM
	101 06 000100.022	101 06 000101.022	101 06 000102.022	Black	Phase DIM
	101 06 000100.013	101 06 000101.013	101 06 000102.013	White	DALI
	101 06 000100.023	101 06 000101.023	101 06 000102.023	Black	DALI
3000°K	101 06 000103.011	101 06 000104.011	101 06 000105.011	White	Fixed Output
	101 06 000103.021	101 06 000104.021	101 06 000105.021	Black	Fixed Output
	101 06 000103.012	101 06 000104.012	101 06 000105.012	White	Phase DIM
	101 06 000103.022	101 06 000104.022	101 06 000105.022	Black	Phase DIM
	101 06 000103.013	101 06 000104.013	101 06 000105.013	White	DALI
	101 06 000103.023	101 06 000104.023	101 06 000105.023	Black	DALI
4000°K	101 06 000106.011	101 06 000107.011	101 06 000108.011	White	Fixed Output
	101 06 000106.021	101 06 000107.021	101 06 000108.021	Black	Fixed Output
	101 06 000106.012	101 06 000107.012	101 06 000108.012	White	Phase DIM
	101 06 000106.022	101 06 000107.022	101 06 000108.022	Black	Phase DIM
	101 06 000106.013	101 06 000107.013	101 06 000108.013	White	DALI
	101 06 000106.023	101 06 000107.023	101 06 000108.023	Black	DALI
2700-1800°K	101 06 000109.011	101 06 000110.011	101 06 000111.011	White	Fixed Output
	101 06 000109.021	101 06 000110.021	101 06 000111.021	Black	Fixed Output
	101 06 000109.012	101 06 000110.012	101 06 000111.012	White	Phase DIM
	101 06 000109.022	101 06 000110.022	101 06 000111.022	Black	Phase DIM
	101 06 000109.013	101 06 000110.013	101 06 000111.013	White	DALI
	101 06 000109.023	101 06 000110.023	101 06 000111.023	Black	DALI

iilus.com