

# Product Manual

Mono 060 Recessed Downlighter Type 2




# Mono 060 Recessed Type 2




Recessed ceiling luminaire with rotationally symmetrical medium, flood or wide flood optics, high colour reproduction, fixed orientation. High pressure die-cast powdercoated facade with anti-glare baffle and shallow recess depth. Includes direct fast connector to remote driver. Active power factor correction, current regulation, voltage spike protection.

## System

<b>Power</b>	8W		
<b>Current</b>	180mA		
<b>Colour Temperature</b>	2700°K / 3000°K / 4000°K / 2700-1800°K		
<b>Lumen Maintenance</b>	L90 B10 50 000hr		
<b>CRI</b>	Ra97		
<b>Tm30</b>	R95 F103		
<b>Chromacity</b>	<3 SCDM		
<b>Articulation</b>	Fixed		
<b>Cut-Out</b>	54mm Round x 75mm Depth		
<b>Ingress Protection</b>	IP44		
	<b>FL - 25°</b>	<b>MFL - 40°</b>	<b>WFL - 60°</b>
<b>2700°K</b>	576lm	626lm	624lm
<b>3000°K</b>	642lm	680lm	672lm
<b>4000°K</b>	610lm	615lm	650lm



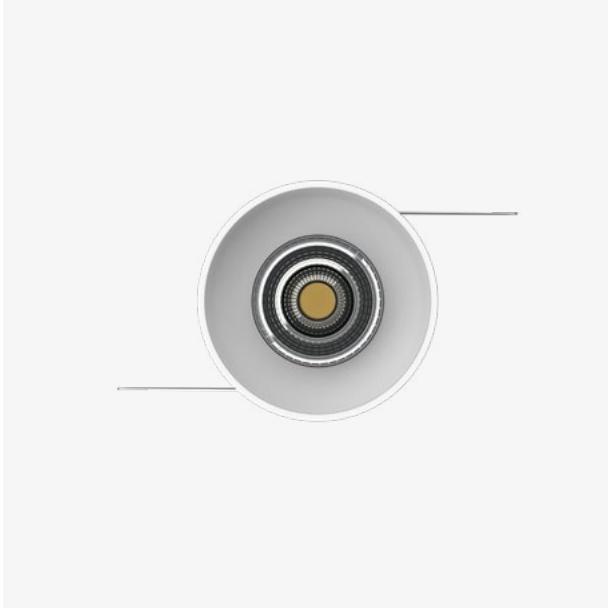



Mono

Type 2



Page — 04

# Model References

	FL - 25°	MFL - 40°	WFL - 60°		
<b>2700°K</b>	101 06 000200.011	101 06 000201.011	101 06 000202.011	White	Fixed Output
	101 06 000200.021	101 06 000201.021	101 06 000202.021	Black	Fixed Output
	101 06 000200.012	101 06 000201.012	101 06 000202.012	White	Phase DIM
	101 06 000200.022	101 06 000201.022	101 06 000202.022	Black	Phase DIM
	101 06 000200.013	101 06 000201.013	101 06 000202.013	White	DALI
	101 06 000200.023	101 06 000201.023	101 06 000202.023	Black	DALI
<b>3000°K</b>	101 06 000203.011	101 06 000204.011	101 06 000205.011	White	Fixed Output
	101 06 000203.021	101 06 000204.021	101 06 000205.021	Black	Fixed Output
	101 06 000203.012	101 06 000204.012	101 06 000205.012	White	Phase DIM
	101 06 000203.022	101 06 000204.022	101 06 000205.022	Black	Phase DIM
	101 06 000203.013	101 06 000204.013	101 06 000205.013	White	DALI
	101 06 000203.023	101 06 000204.023	101 06 000205.023	Black	DALI
<b>4000°K</b>	101 06 000206.011	101 06 000207.011	101 06 000208.011	White	Fixed Output
	101 06 000206.021	101 06 000207.021	101 06 000208.021	Black	Fixed Output
	101 06 000206.012	101 06 000207.012	101 06 000208.012	White	Phase DIM
	101 06 000206.022	101 06 000207.022	101 06 000208.022	Black	Phase DIM
	101 06 000206.013	101 06 000207.013	101 06 000208.013	White	DALI
	101 06 000206.023	101 06 000207.023	101 06 000208.023	Black	DALI
<b>2700-1800°K</b>	101 06 000209.011	101 06 000210.011	101 06 000211.011	White	Fixed Output
	101 06 000209.021	101 06 000210.021	101 06 000211.021	Black	Fixed Output
	101 06 000209.012	101 06 000210.012	101 06 000211.012	White	Phase DIM
	101 06 000209.022	101 06 000210.022	101 06 000211.022	Black	Phase DIM
	101 06 000209.013	101 06 000210.013	101 06 000211.013	White	DALI
	101 06 000209.023	101 06 000210.023	101 06 000211.023	Black	DALI











[iilus.com](http://iilus.com)