

Product Manual

Mono 060 IP Surface Downlighter Type 3



Mono 060 IP Surface Type 3





Surface mounted ceiling luminaire with rotationally symmetrical medium, flood or wide flood optics, high colour reproduction, fixed orientation. Extruded marine-grade aluminium housing with nano-ceramic pre-treatment, high pressure die-cast powdercoated facade and anti-glare snoot. Integrated driver. Active power factor correction, current regulation, voltage spike protection.

System

Power	8W
Current	180mA
Colour Temperature	2700°K / 3000°K / 4000°K / 2700-1800°K
Lumen Maintenance	L90 B10 50 000hr
CRI	Ra97
Tm30	R95 F103
Chromacity	<3 SCDM
Articulation	Fixed
Ingress Protection	IP54

	FL - 25°	MFL - 40°	WFL - 60°
2700°K	576lm	626lm	624lm
3000°K	642lm	680lm	672lm
4000°K	610lm	615lm	650lm



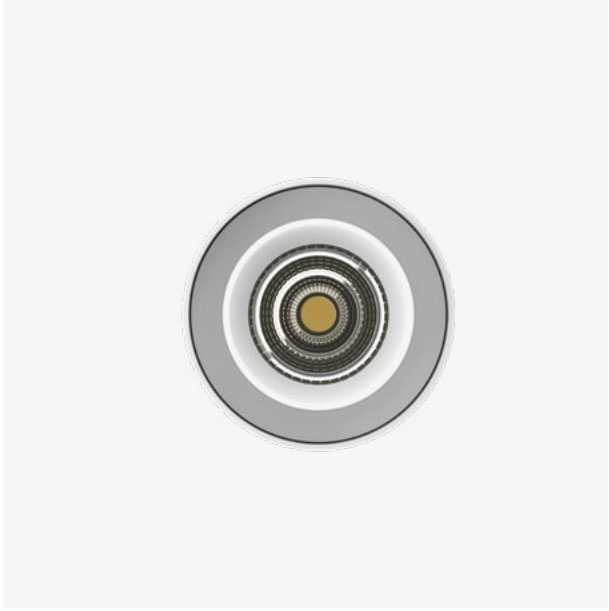



Model References

	FL - 25°	MFL - 40°	WFL - 60°		
2700°K	101 06 101300.012	101 06 101301.012	101 06 101302.012	White	Phase DIM
	101 06 101300.022	101 06 101301.022	101 06 101302.022	Black	Phase DIM
3000°K	101 06 101303.012	101 06 101304.012	101 06 101305.012	White	Phase DIM
	101 06 101303.022	101 06 101304.022	101 06 101305.022	Black	Phase DIM
4000°K	101 06 101306.012	101 06 101307.012	101 06 101308.012	White	Phase DIM
	101 06 101306.022	101 06 101307.022	101 06 101308.022	Black	Phase DIM
2700°K	101 06 101300.012	101 06 101301.012	101 06 101302.012	White	Control Excluded
	101 06 101300.022	101 06 101301.022	101 06 101302.022	Black	Control Excluded
3000°K	101 06 101303.012	101 06 101304.012	101 06 101305.012	White	Control Excluded
	101 06 101303.022	101 06 101304.022	101 06 101305.022	Black	Control Excluded
4000°K	101 06 101306.012	101 06 101307.012	101 06 101308.012	White	Control Excluded
	101 06 101306.022	101 06 101307.022	101 06 101308.022	Black	Control Excluded
2700-1800°K	101 06 101309.010	101 06 101310.010	101 06 101311.010	White	Control Excluded
	101 06 101309.020	101 06 101310.020	101 06 101311.020	Black	Control Excluded
Remote Drivers	981 00 000818.022	CC LED Driver 8W 180mA LE-TE P1S1			Phase DIM
	981 00 202018.023	CC-CV LED Driver 9W 180mA DALI P1S1			DALI

iilus.com