

Product Manual

Mono 100 Recessed Downlighter Type 1




Mono 100

Type 1



Recessed ceiling luminaire with rotationally symmetrical spot, flood or wide flood optics, high colour reproduction, fixed orientation. High pressure die-cast powdercoated facade with inset detail. Includes direct fast connector to remote driver. Active power factor correction, current regulation, voltage spike protection. Optional spreader lens, linear spreader lens, diffuser lens, or hex louvre; factory fitted.



System

Power	14W / 19W / 27W
Input	220V-240V / 50-60Hz
Colour Temperature	2700°K / 3000°K / 4000°K
Lumen Maintenance	L90 B10 50 000hr
CRI	Ra97
Tm30	R95 F103
Chromacity	<3 SCDM
Articulation	Fixed
Ingress Protection	IP44


14W	SP - 15°	FL - 30°	WFL - 60°
2700°K	956lm	1013lm	981lm
3000°K	953lm	942lm	1037lm
4000°K	1127lm	1095lm	1132lm
19W	SP - 15°	FL - 30°	WFL - 60°
2700°K	1314lm	1300lm	1350lm
3000°K	1320lm	1300lm	1436lm
4000°K	1548lm	1508lm	1568lm
27W	SP - 15°	FL - 30°	WFL - 60°
2700°K	1763lm	1750lm	1765lm
3000°K	1781lm	1770lm	1939lm
4000°K	2091lm	2029lm	2110lm





- Hex Louvre ▲
- Linear Spreader Lens ►
- Spreader Lens ►
- Diffuser Lens ►



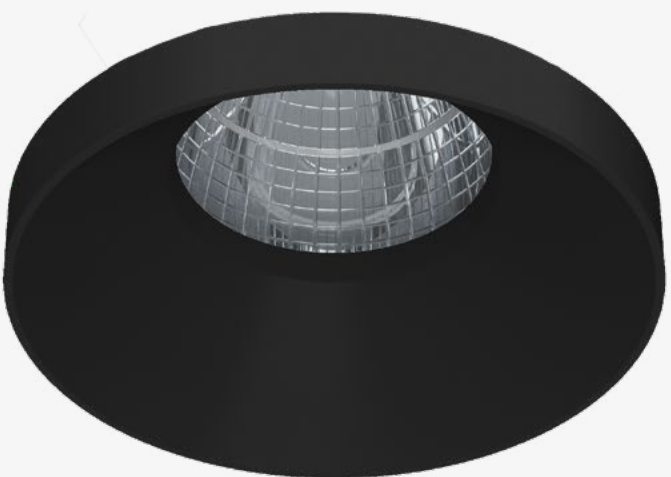



- Hex Louvre ▲
- Linear Spreader Lens ▲
- Diffuser Lens ►
- Spreader Lens ►

Model References

14W	SP - 15°	FL - 30°	WFL - 60°		
2700°K	101 10 000100.011	101 10 000101.011	101 10 000102.011	White	Fixed Output
	101 10 000100.211	101 10 000101.021	101 10 000102.021	Black	Fixed Output
	101 10 000100.012	101 10 000101.012	101 10 000102.012	White	Phase DIM
	101 10 000100.212	101 10 000101.022	101 10 000102.022	Black	Phase DIM
	101 10 000100.013	101 10 000101.013	101 10 000102.013	White	DALI
	101 10 000100.213	101 10 000101.023	101 10 000102.023	Black	DALI
	101 10 000100.015	101 10 000101.015	101 10 000102.015	White	Bluetooth
	101 10 000100.215	101 10 000101.025	101 10 000102.025	Black	Bluetooth
3000°K	101 10 000103.011	101 10 000104.011	101 10 000105.011	White	Fixed Output
	101 10 000103.211	101 10 000104.021	101 10 000105.021	Black	Fixed Output
	101 10 000103.012	101 10 000104.012	101 10 000105.012	White	Phase DIM
	101 10 000103.212	101 10 000104.022	101 10 000105.022	Black	Phase DIM
	101 10 000103.013	101 10 000104.013	101 10 000105.013	White	DALI
	101 10 000103.213	101 10 000104.023	101 10 000105.023	Black	DALI
	101 10 000103.015	101 10 000104.015	101 10 000105.015	White	Bluetooth
	101 10 000103.215	101 10 000104.025	101 10 000105.025	Black	Bluetooth
4000°K	101 10 000106.011	101 10 000107.011	101 10 000108.011	White	Fixed Output
	101 10 000106.211	101 10 000107.021	101 10 000108.021	Black	Fixed Output
	101 10 000106.012	101 10 000107.012	101 10 000108.012	White	Phase DIM
	101 10 000106.212	101 10 000107.022	101 10 000108.022	Black	Phase DIM
	101 10 000106.013	101 10 000107.013	101 10 000108.013	White	DALI
	101 10 000106.213	101 10 000107.023	101 10 000108.023	Black	DALI
	101 10 000106.015	101 10 000107.015	101 10 000108.015	White	Bluetooth
	101 10 000106.215	101 10 000107.025	101 10 000108.025	Black	Bluetooth

19W	SP - 15°	FL - 30°	WFL - 60°		
2700°K	101 10 000109.011	101 10 000110.011	101 10 000111.011	White	Fixed Output
	101 10 000109.211	101 10 000110.021	101 10 000111.021	Black	Fixed Output
	101 10 000109.012	101 10 000110.012	101 10 000111.012	White	Phase DIM
	101 10 000109.212	101 10 000110.022	101 10 000111.022	Black	Phase DIM
	101 10 000109.013	101 10 000110.013	101 10 000111.013	White	DALI
	101 10 000109.213	101 10 000110.023	101 10 000111.023	Black	DALI
	101 10 000109.015	101 10 000110.015	101 10 000111.015	White	Bluetooth
	101 10 000109.215	101 10 000110.025	101 10 000111.025	Black	Bluetooth
3000°K	101 10 000112.011	101 10 000113.011	101 10 000114.011	White	Fixed Output
	101 10 000112.211	101 10 000113.021	101 10 000114.021	Black	Fixed Output
	101 10 000112.012	101 10 000113.012	101 10 000114.012	White	Phase DIM
	101 10 000112.212	101 10 000113.022	101 10 000114.022	Black	Phase DIM
	101 10 000112.013	101 10 000113.013	101 10 000114.013	White	DALI
	101 10 000112.213	101 10 000113.023	101 10 000114.023	Black	DALI
	101 10 000112.015	101 10 000113.015	101 10 000114.015	White	Bluetooth
	101 10 000112.215	101 10 000113.025	101 10 000114.025	Black	Bluetooth
4000°K	101 10 000115.011	101 10 000116.011	101 10 000117.011	White	Fixed Output
	101 10 000115.211	101 10 000116.021	101 10 000117.021	Black	Fixed Output
	101 10 000115.012	101 10 000116.012	101 10 000117.012	White	Phase DIM
	101 10 000115.212	101 10 000116.022	101 10 000117.022	Black	Phase DIM
	101 10 000115.013	101 10 000116.013	101 10 000117.013	White	DALI
	101 10 000115.213	101 10 000116.023	101 10 000117.023	Black	DALI
	101 10 000115.015	101 10 000116.015	101 10 000117.015	White	Bluetooth
	101 10 000115.215	101 10 000116.025	101 10 000117.025	Black	Bluetooth

Optical Accessories

990 00 006501.020	Asymmetrical Lens A1 065
990 00 006502.000	Asymmetrical Lens A2 065
990 00 006503.000	Hex Louvre 065
990 00 006504.000	Spreader Lens 065
990 00 006505.000	Linear Spreader Lens 065
990 00 006506.000	Diffuser Lens 80% Transmission 065
990 00 006507.000	Diffuser Lens 50% Transmission 065
990 00 006508.000	Low UGR Workplace Optic Lens 065

iilus.com