

Product Manual

Mono 100 Recessed Downlighter Type 2




Mono 100

Type 2




Recessed ceiling luminaire with rotationally symmetrical spot, flood or wide flood optics, high colour reproduction, fixed orientation. High pressure die-cast powdercoated facade with expressed detail, anti-glare baffle. Includes direct fast connector to remote driver. Active power factor correction, current regulation, voltage spike protection. Optional spreader lens, linear spreader lens, diffuser lens, or hex louvre; factory fitted.



System

Power	14W / 19W / 27W
Input	220V-240V / 50-60Hz
Colour Temperature	2700°K / 3000°K / 4000°K
Lumen Maintenance	L90 B10 50 000hr
CRI	Ra97
Tm30	R95 F103
Chromacity	<3 SCDM
Articulation	Fixed
Ingress Protection	IP44


14W	SP - 15°	FL - 30°	WFL - 60°
2700°K	956lm	1013lm	981lm
3000°K	953lm	942lm	1037lm
4000°K	1127lm	1095lm	1132lm
19W	SP - 15°	FL - 30°	WFL - 60°
2700°K	1314lm	1300lm	1350lm
3000°K	1320lm	1300lm	1436lm
4000°K	1548lm	1508lm	1568lm
27W	SP - 15°	FL - 30°	WFL - 60°
2700°K	1763lm	1750lm	1765lm
3000°K	1781lm	1770lm	1939lm
4000°K	2091lm	2029lm	2110lm

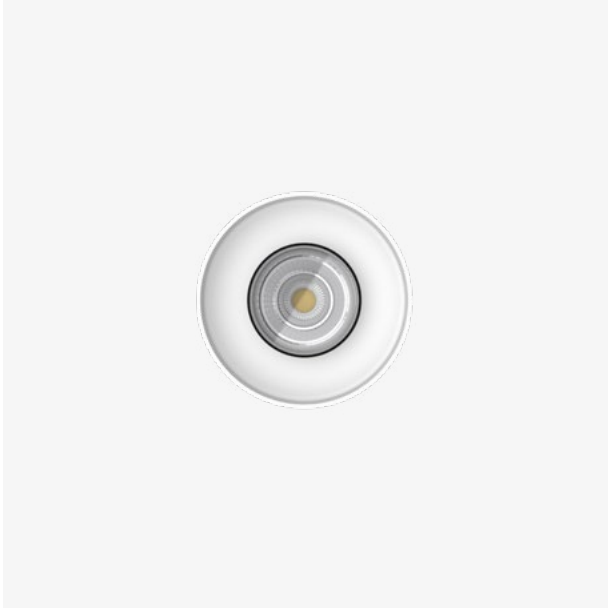



- Hex Louvre ▲
- Linear Spreader Lens ►
- Spreader Lens ►
- Diffuser Lens ►



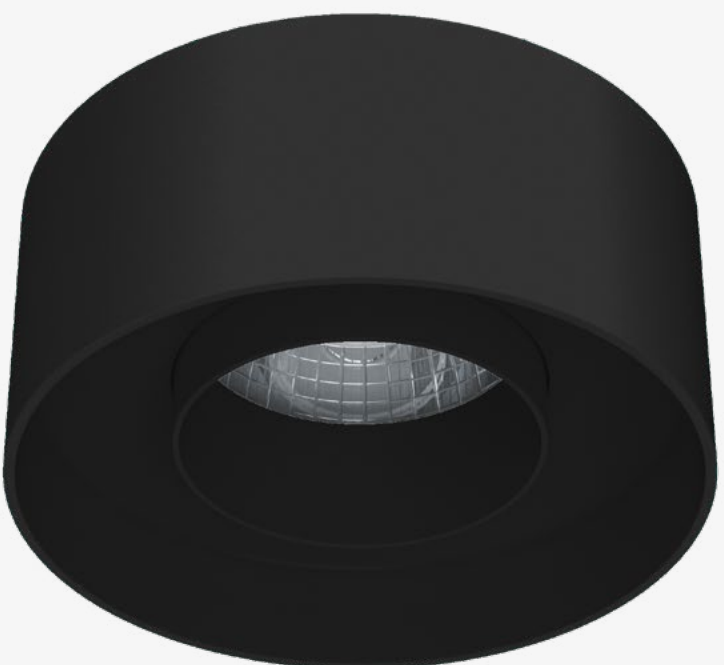



- Hex Louvre ▲
- Linear Spreader Lens ▲
- Diffuser Lens ►
- Spreader Lens ►

Model References

14W	SP - 15°	FL - 30°	WFL - 60°		
2700°K	101 10 000200.011	101 10 000201.011	101 10 000202.011	White	Fixed Output
	101 10 000200.211	101 10 000201.021	101 10 000202.021	Black	Fixed Output
	101 10 000200.012	101 10 000201.012	101 10 000202.012	White	Phase DIM
	101 10 000200.212	101 10 000201.022	101 10 000202.022	Black	Phase DIM
	101 10 000200.013	101 10 000201.013	101 10 000202.013	White	DALI
	101 10 000200.213	101 10 000201.023	101 10 000202.023	Black	DALI
	101 10 000200.015	101 10 000201.015	101 10 000202.015	White	Bluetooth
	101 10 000200.215	101 10 000201.025	101 10 000202.025	Black	Bluetooth
3000°K	101 10 000203.011	101 10 000204.011	101 10 000205.011	White	Fixed Output
	101 10 000203.211	101 10 000204.021	101 10 000205.021	Black	Fixed Output
	101 10 000203.012	101 10 000204.012	101 10 000205.012	White	Phase DIM
	101 10 000203.212	101 10 000204.022	101 10 000205.022	Black	Phase DIM
	101 10 000203.013	101 10 000204.013	101 10 000205.013	White	DALI
	101 10 000203.213	101 10 000204.023	101 10 000205.023	Black	DALI
	101 10 000203.015	101 10 000204.015	101 10 000205.015	White	Bluetooth
	101 10 000203.215	101 10 000204.025	101 10 000205.025	Black	Bluetooth
4000°K	101 10 000206.011	101 10 000207.011	101 10 000208.011	White	Fixed Output
	101 10 000206.211	101 10 000207.021	101 10 000208.021	Black	Fixed Output
	101 10 000206.012	101 10 000207.012	101 10 000208.012	White	Phase DIM
	101 10 000206.212	101 10 000207.022	101 10 000208.022	Black	Phase DIM
	101 10 000206.013	101 10 000207.013	101 10 000208.013	White	DALI
	101 10 000206.213	101 10 000207.023	101 10 000208.023	Black	DALI
	101 10 000206.015	101 10 000207.015	101 10 000208.015	White	Bluetooth
	101 10 000206.215	101 10 000207.025	101 10 000208.025	Black	Bluetooth

19W	SP - 15°	FL - 30°	WFL - 60°		
2700°K	101 10 000209.011	101 10 000210.011	101 10 000211.011	White	Fixed Output
	101 10 000209.211	101 10 000210.021	101 10 000211.021	Black	Fixed Output
	101 10 000209.012	101 10 000210.012	101 10 000211.012	White	Phase DIM
	101 10 000209.212	101 10 000210.022	101 10 000211.022	Black	Phase DIM
	101 10 000209.013	101 10 000210.013	101 10 000211.013	White	DALI
	101 10 000209.213	101 10 000210.023	101 10 000211.023	Black	DALI
	101 10 000209.015	101 10 000210.015	101 10 000211.015	White	Bluetooth
	101 10 000209.215	101 10 000210.025	101 10 000211.025	Black	Bluetooth
3000°K	101 10 000212.011	101 10 000213.011	101 10 000214.011	White	Fixed Output
	101 10 000212.211	101 10 000213.021	101 10 000214.021	Black	Fixed Output
	101 10 000212.012	101 10 000213.012	101 10 000214.012	White	Phase DIM
	101 10 000212.212	101 10 000213.022	101 10 000214.022	Black	Phase DIM
	101 10 000212.013	101 10 000213.013	101 10 000214.013	White	DALI
	101 10 000212.213	101 10 000213.023	101 10 000214.023	Black	DALI
	101 10 000212.015	101 10 000213.015	101 10 000214.015	White	Bluetooth
	101 10 000212.215	101 10 000213.025	101 10 000214.025	Black	Bluetooth
4000°K	101 10 000215.011	101 10 000216.011	101 10 000217.011	White	Fixed Output
	101 10 000215.211	101 10 000216.021	101 10 000217.021	Black	Fixed Output
	101 10 000215.012	101 10 000216.012	101 10 000217.012	White	Phase DIM
	101 10 000215.212	101 10 000216.022	101 10 000217.022	Black	Phase DIM
	101 10 000215.013	101 10 000216.013	101 10 000217.013	White	DALI
	101 10 000215.213	101 10 000216.023	101 10 000217.023	Black	DALI
	101 10 000215.015	101 10 000216.015	101 10 000217.015	White	Bluetooth
	101 10 000215.215	101 10 000216.025	101 10 000217.025	Black	Bluetooth

Optical Accessories

990 00 006501.020	Asymmetrical Lens A1 065
990 00 006502.000	Asymmetrical Lens A2 065
990 00 006503.000	Hex Louvre 065
990 00 006504.000	Spreader Lens 065
990 00 006505.000	Linear Spreader Lens 065
990 00 006506.000	Diffuser Lens 80% Transmission 065
990 00 006507.000	Diffuser Lens 50% Transmission 065
990 00 006508.000	Low UGR Workplace Optic Lens 065

iilus.com