

Product Manual

Mono 100 Trimless Recessed Downlighter
Type 1




Mono 100 Trimless Type 1



Recessed ceiling luminaire with rotationally symmetrical spot, flood or wide flood optics, high colour reproduction, fixed orientation. High pressure die-cast powdercoated facade with trimless inset detail. Includes direct fast connector to remote driver. Active power factor correction, current regulation, voltage spike protection. Optional spreader lens, linear spreader lens, diffuser lens, or hex louvre; factory fitted.

140 - 150



178


System


Power	14W / 19W / 27W
Input	220V-240V / 50-60Hz
Colour Temperature	2700°K / 3000°K / 4000°K
Lumen Maintenance	L90 B10 50 000hr
CRI	Ra97
Tm30	R95 F103
Chromacity	<3 SCDM
Articulation	Fixed
Ingress Protection	IP20

14W	SP - 15°	FL - 30°	WFL - 60°
2700°K	956lm	1013lm	981lm
3000°K	953lm	942lm	1037lm
4000°K	1127lm	1095lm	1132lm

19W	SP - 15°	FL - 30°	WFL - 60°
2700°K	1314lm	1300lm	1350lm
3000°K	1320lm	1300lm	1436lm
4000°K	1548lm	1508lm	1568lm

27W	SP - 15°	FL - 30°	WFL - 60°
2700°K	1763lm	1750lm	1765lm
3000°K	1781lm	1770lm	1939lm
4000°K	2091lm	2029lm	2110lm

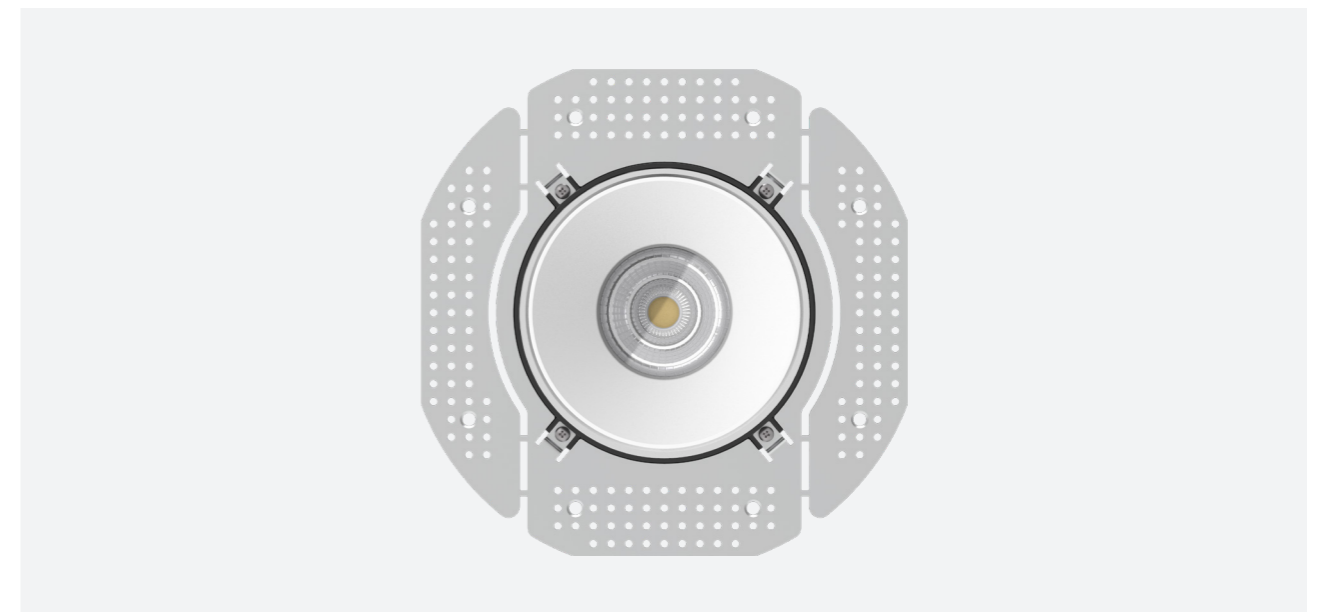

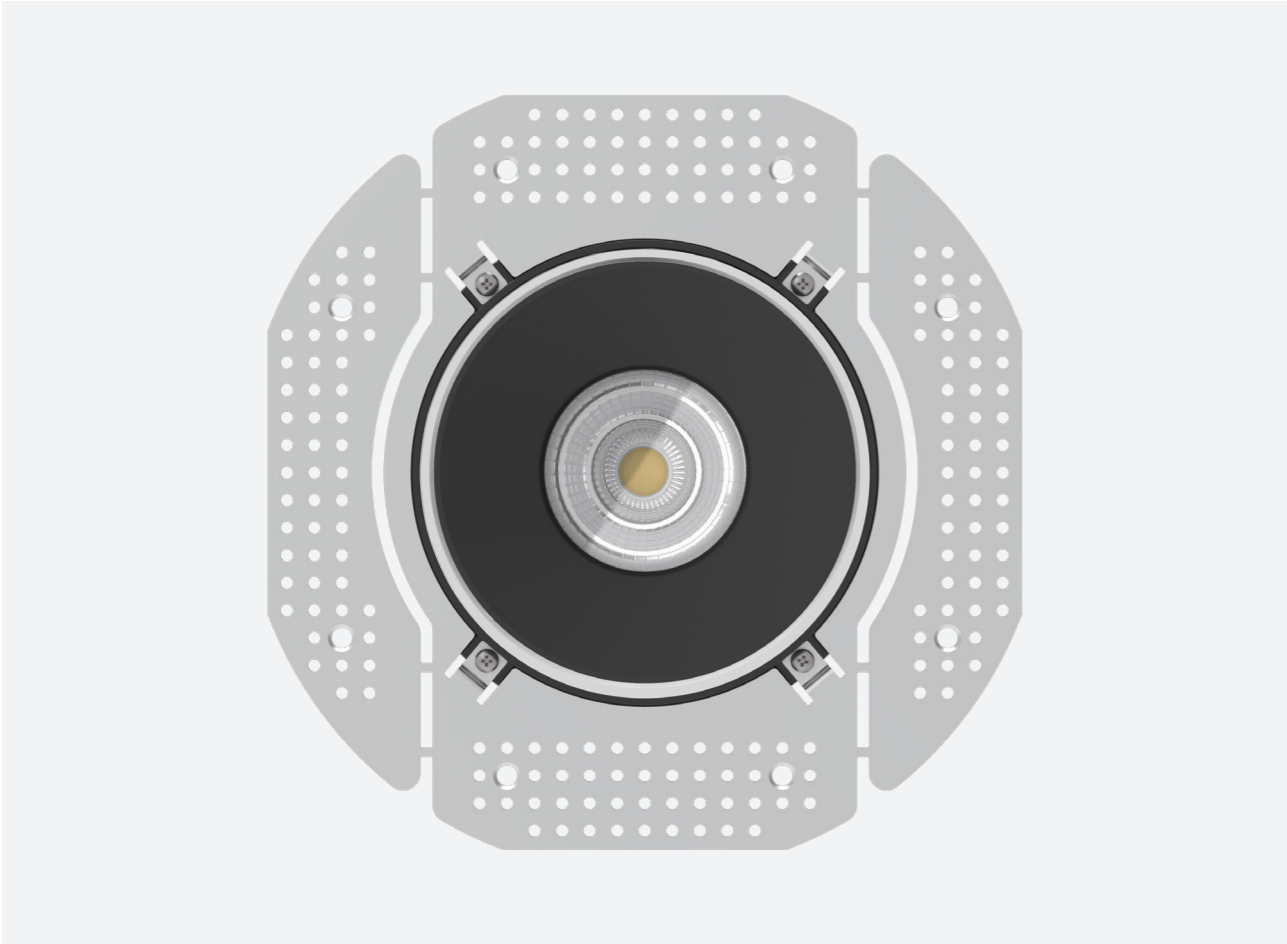

Model References

14W	SP - 15°	FL - 30°	WFL - 60°		
2700°K	101 10 002100.011	101 10 002101.011	101 10 002102.011	White	Fixed Output
	101 10 002100.211	101 10 002101.021	101 10 002102.021	Black	Fixed Output
	101 10 002100.012	101 10 002101.012	101 10 002102.012	White	Phase DIM
	101 10 002100.212	101 10 002101.022	101 10 002102.022	Black	Phase DIM
	101 10 002100.013	101 10 002101.013	101 10 002102.013	White	DALI
	101 10 002100.213	101 10 002101.023	101 10 002102.023	Black	DALI
	101 10 002100.015	101 10 002101.015	101 10 002102.015	White	Bluetooth
	101 10 002100.215	101 10 002101.025	101 10 002102.025	Black	Bluetooth
3000°K	101 10 002103.011	101 10 002104.011	101 10 002105.011	White	Fixed Output
	101 10 002103.211	101 10 002104.021	101 10 002105.021	Black	Fixed Output
	101 10 002103.012	101 10 002104.012	101 10 002105.012	White	Phase DIM
	101 10 002103.212	101 10 002104.022	101 10 002105.022	Black	Phase DIM
	101 10 002103.013	101 10 002104.013	101 10 002105.013	White	DALI
	101 10 002103.213	101 10 002104.023	101 10 002105.023	Black	DALI
	101 10 002103.015	101 10 002104.015	101 10 002105.015	White	Bluetooth
	101 10 002103.215	101 10 002104.025	101 10 002105.025	Black	Bluetooth
4000°K	101 10 002106.011	101 10 002107.011	101 10 002108.011	White	Fixed Output
	101 10 002106.211	101 10 002107.021	101 10 002108.021	Black	Fixed Output
	101 10 002106.012	101 10 002107.012	101 10 002108.012	White	Phase DIM
	101 10 002106.212	101 10 002107.022	101 10 002108.022	Black	Phase DIM
	101 10 002106.013	101 10 002107.013	101 10 002108.013	White	DALI
	101 10 002106.213	101 10 002107.023	101 10 002108.023	Black	DALI
	101 10 002106.015	101 10 002107.015	101 10 002108.015	White	Bluetooth
	101 10 002106.215	101 10 002107.025	101 10 002108.025	Black	Bluetooth

19W	SP - 15°	FL - 30°	WFL - 60°		
2700°K	101 10 002109.011	101 10 002110.011	101 10 002111.011	White	Fixed Output
	101 10 002109.211	101 10 002110.021	101 10 002111.021	Black	Fixed Output
	101 10 002109.012	101 10 002110.012	101 10 002111.012	White	Phase DIM
	101 10 002109.212	101 10 002110.022	101 10 002111.022	Black	Phase DIM
	101 10 002109.013	101 10 002110.013	101 10 002111.013	White	DALI
	101 10 002109.213	101 10 002110.023	101 10 002111.023	Black	DALI
	101 10 002109.015	101 10 002110.015	101 10 002111.015	White	Bluetooth
	101 10 002109.215	101 10 002110.025	101 10 002111.025	Black	Bluetooth
3000°K	101 10 002112.011	101 10 002113.011	101 10 002114.011	White	Fixed Output
	101 10 002112.211	101 10 002113.021	101 10 002114.021	Black	Fixed Output
	101 10 002112.012	101 10 002113.012	101 10 002114.012	White	Phase DIM
	101 10 002112.212	101 10 002113.022	101 10 002114.022	Black	Phase DIM
	101 10 002112.013	101 10 002113.013	101 10 002114.013	White	DALI
	101 10 002112.213	101 10 002113.023	101 10 002114.023	Black	DALI
	101 10 002112.015	101 10 002113.015	101 10 002114.015	White	Bluetooth
	101 10 002112.215	101 10 002113.025	101 10 002114.025	Black	Bluetooth
4000°K	101 10 002115.011	101 10 002116.011	101 10 002117.011	White	Fixed Output
	101 10 002115.211	101 10 002116.021	101 10 002117.021	Black	Fixed Output
	101 10 002115.012	101 10 002116.012	101 10 002117.012	White	Phase DIM
	101 10 002115.212	101 10 002116.022	101 10 002117.022	Black	Phase DIM
	101 10 002115.013	101 10 002116.013	101 10 002117.013	White	DALI
	101 10 002115.213	101 10 002116.023	101 10 002117.023	Black	DALI
	101 10 002115.015	101 10 002116.015	101 10 002117.015	White	Bluetooth
	101 10 002115.215	101 10 002116.025	101 10 002117.025	Black	Bluetooth

Model References

27W	SP - 15°	FL - 30°	WFL - 60°		
2700°K	101 10 002118.011	101 10 002119.011	101 10 002120.011	White	Fixed Output
	101 10 002118.211	101 10 002119.021	101 10 002120.021	Black	Fixed Output
	101 10 002118.012	101 10 002119.012	101 10 002120.012	White	Phase DIM
	101 10 002118.212	101 10 002119.022	101 10 002120.022	Black	Phase DIM
	101 10 002118.013	101 10 002119.013	101 10 002120.013	White	DALI
	101 10 002118.213	101 10 002119.023	101 10 002120.023	Black	DALI
	101 10 002118.015	101 10 002119.015	101 10 002120.015	White	Bluetooth
	101 10 002118.215	101 10 002119.025	101 10 002120.025	Black	Bluetooth
3000°K	101 10 002121.011	101 10 002122.011	101 10 002123.011	White	Fixed Output
	101 10 002121.211	101 10 002122.021	101 10 002123.021	Black	Fixed Output
	101 10 002121.012	101 10 002122.012	101 10 002123.012	White	Phase DIM
	101 10 002121.212	101 10 002122.022	101 10 002123.022	Black	Phase DIM
	101 10 002121.013	101 10 002122.013	101 10 002123.013	White	DALI
	101 10 002121.213	101 10 002122.023	101 10 002123.023	Black	DALI
	101 10 002121.015	101 10 002122.015	101 10 002123.015	White	Bluetooth
	101 10 002121.215	101 10 002122.025	101 10 002123.025	Black	Bluetooth
4000°K	101 10 002124.011	101 10 002125.011	101 10 002126.011	White	Fixed Output
	101 10 002124.211	101 10 002125.021	101 10 002126.021	Black	Fixed Output
	101 10 002124.012	101 10 002125.012	101 10 002126.012	White	Phase DIM
	101 10 002124.212	101 10 002125.022	101 10 002126.022	Black	Phase DIM
	101 10 002124.013	101 10 002125.013	101 10 002126.013	White	DALI
	101 10 002124.213	101 10 002125.023	101 10 002126.023	Black	DALI
	101 10 002124.015	101 10 002125.015	101 10 002126.015	White	Bluetooth
	101 10 002124.215	101 10 002125.025	101 10 002126.025	Black	Bluetooth

Optical Accessories

990 00 006501.020	Asymmetrical Lens A1 065
990 00 006502.000	Asymmetrical Lens A2 065
990 00 006503.000	Hex Louvre 065
990 00 006504.000	Spreader Lens 065
990 00 006505.000	Linear Spreader Lens 065
990 00 006506.000	Diffuser Lens 80% Transmission 065
990 00 006507.000	Diffuser Lens 50% Transmission 065
990 00 006508.000	Low UGR Workplace Optic Lens 065