

Product Manual

Mono 100-150 Surface Downlighter Type 2




IILUS

Mono 100-150 Surface Type 2




Surface mounted ceiling luminaire with rotationally symmetrical spot, flood or wide flood optics, high colour reproduction, fixed orientation. High pressure die-cast powdercoated facade with anti-glare baffle detail. Remote driver. Active power factor correction, current regulation, voltage spike protection.




System

Power	14W / 19W / 27W
Input	220V-240V / 50-60Hz
Colour Temperature	2700°K / 3000°K / 4000°K
Lumen Maintenance	14W 19W L90 B10 50 000hr / 27W L80 B20 50 000hr
CRI	Ra97
Tm30	R95 F103
Chromacity	<2 SDCM
Articulation	Fixed
Ingress Protection	IP44
Control	Remote (Included)

14W	SP - 15°	FL - 30°	WFL - 60°
2700°K	956lm	1013lm	981lm
3000°K	953lm	942lm	1037lm
4000°K	1127lm	1095lm	1132lm
19W	SP - 15°	FL - 30°	WFL - 60°
2700°K	1314lm	1300lm	1350lm
3000°K	1320lm	1300lm	1436lm
4000°K	1548lm	1508lm	1568lm
27W	SP - 15°	FL - 30°	WFL - 60°
2700°K	1763lm	1750lm	1765lm
3000°K	1781lm	1770lm	1939lm
4000°K	2091lm	2029lm	2110lm

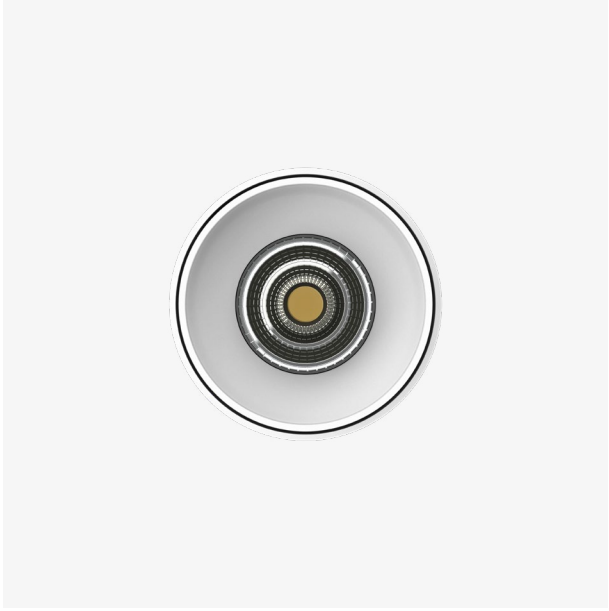



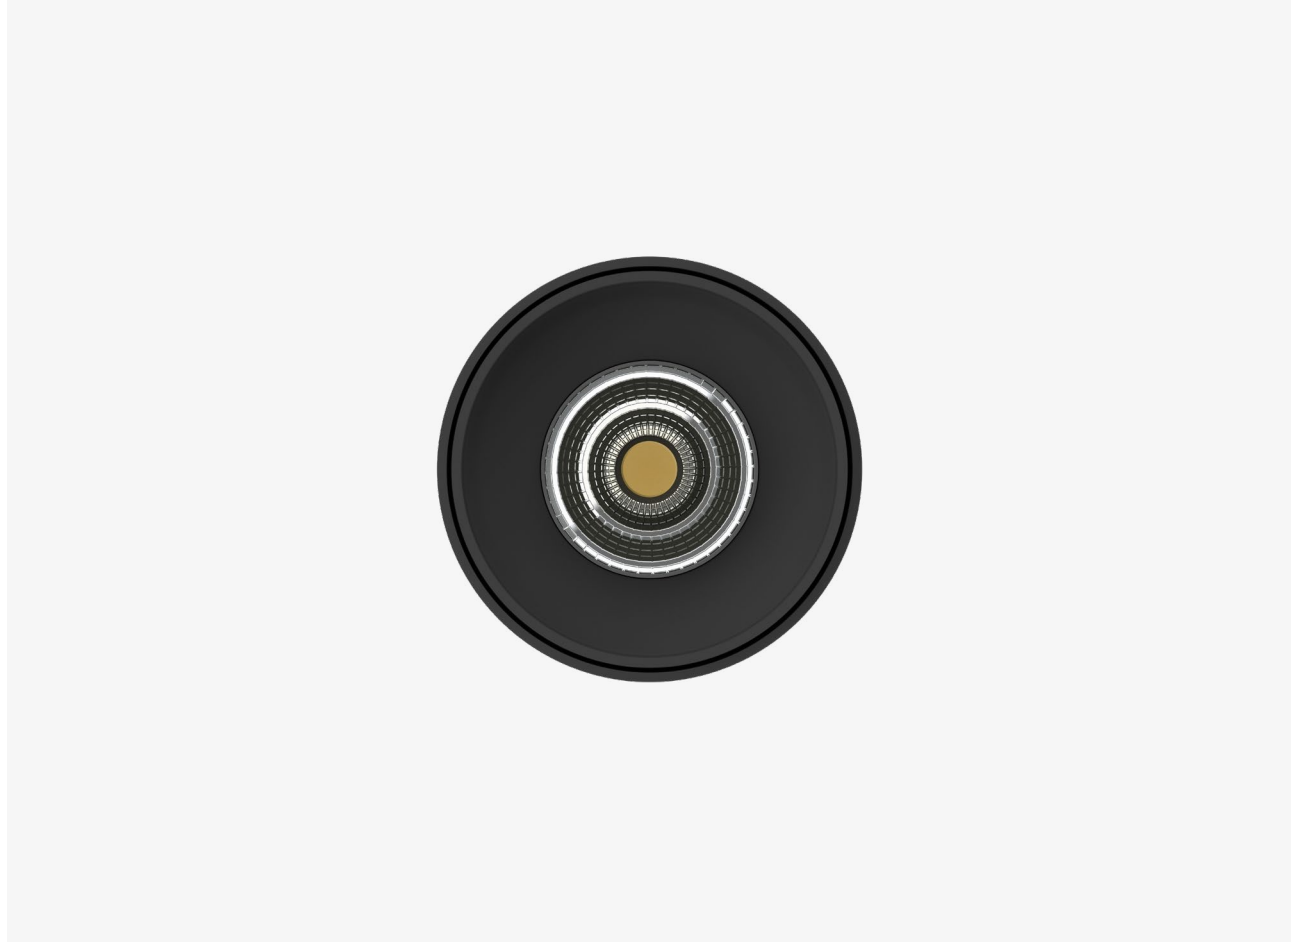

Model References

14W	SP - 15°	FL - 30°	WFL - 60°		
2700°K	101 10 102200.011	101 10 102201.011	101 10 102202.011	White	Fixed Output
	101 10 102200.211	101 10 102201.021	101 10 102202.021	Black	Fixed Output
	101 10 102200.012	101 10 102201.012	101 10 102202.012	White	Phase DIM
	101 10 102200.212	101 10 102201.022	101 10 102202.022	Black	Phase DIM
	101 10 102200.013	101 10 102201.013	101 10 102202.013	White	DALI
	101 10 102200.213	101 10 102201.023	101 10 102202.023	Black	DALI
	101 10 102200.015	101 10 102201.015	101 10 102202.015	White	Bluetooth
	101 10 102200.215	101 10 102201.025	101 10 102202.025	Black	Bluetooth
3000°K	101 10 102203.011	101 10 102204.011	101 10 102205.011	White	Fixed Output
	101 10 102203.211	101 10 102204.021	101 10 102205.021	Black	Fixed Output
	101 10 102203.012	101 10 102204.012	101 10 102205.012	White	Phase DIM
	101 10 102203.212	101 10 102204.022	101 10 102205.022	Black	Phase DIM
	101 10 102203.013	101 10 102204.013	101 10 102205.013	White	DALI
	101 10 102203.213	101 10 102204.023	101 10 102205.023	Black	DALI
	101 10 102203.015	101 10 102204.015	101 10 102205.015	White	Bluetooth
	101 10 102203.215	101 10 102204.025	101 10 102205.025	Black	Bluetooth
4000°K	101 10 102206.011	101 10 102207.011	101 10 102208.011	White	Fixed Output
	101 10 102206.211	101 10 102207.021	101 10 102208.021	Black	Fixed Output
	101 10 102206.012	101 10 102207.012	101 10 102208.012	White	Phase DIM
	101 10 102206.212	101 10 102207.022	101 10 102208.022	Black	Phase DIM
	101 10 102206.013	101 10 102207.013	101 10 102208.013	White	DALI
	101 10 102206.213	101 10 102207.023	101 10 102208.023	Black	DALI
	101 10 102206.015	101 10 102207.015	101 10 102208.015	White	Bluetooth
	101 10 102206.215	101 10 102207.025	101 10 102208.025	Black	Bluetooth

19W	FL - 15°	FL - 30°	WFL - 60°		
2700°K	101 10 102209.011	101 10 102210.011	101 10 102211.011	White	Fixed Output
	101 10 102209.211	101 10 102210.021	101 10 102211.021	Black	Fixed Output
	101 10 102209.012	101 10 102210.012	101 10 102211.012	White	Phase DIM
	101 10 102209.212	101 10 102210.022	101 10 102211.022	Black	Phase DIM
	101 10 102209.013	101 10 102210.013	101 10 102211.013	White	DALI
	101 10 102209.213	101 10 102210.023	101 10 102211.023	Black	DALI
	101 10 102209.015	101 10 102210.015	101 10 102211.015	White	Bluetooth
	101 10 102209.215	101 10 102210.025	101 10 102211.025	Black	Bluetooth
3000°K	101 10 102212.011	101 10 102213.011	101 10 102214.011	White	Fixed Output
	101 10 10222.211	101 10 102213.021	101 10 102214.021	Black	Fixed Output
	101 10 102212.012	101 10 102213.012	101 10 102214.012	White	Phase DIM
	101 10 10222.212	101 10 102213.022	101 10 102214.022	Black	Phase DIM
	101 10 102212.013	101 10 102213.013	101 10 102214.013	White	DALI
	101 10 102212.213	101 10 102213.023	101 10 102214.023	Black	DALI
	101 10 102212.015	101 10 102213.015	101 10 102214.015	White	Bluetooth
	101 10 102212.215	101 10 102213.025	101 10 102214.025	Black	Bluetooth
4000°K	101 10 102215.011	101 10 102216.011	101 10 102217.011	White	Fixed Output
	101 10 102215.211	101 10 102216.021	101 10 102217.021	Black	Fixed Output
	101 10 102215.012	101 10 102216.012	101 10 102217.012	White	Phase DIM
	101 10 102215.212	101 10 102216.022	101 10 102217.022	Black	Phase DIM
	101 10 102215.013	101 10 102216.013	101 10 102217.013	White	DALI
	101 10 102215.213	101 10 102216.023	101 10 102217.023	Black	DALI
	101 10 102215.015	101 10 102216.015	101 10 102217.015	White	Bluetooth
	101 10 102215.215	101 10 102216.025	101 10 102217.025	Black	Bluetooth

Model References

27W	SP - 15°	FL - 30°	WFL - 60°		
2700°K	101 10 102218.011	101 10 102219.011	101 10 102220.011	White	Fixed Output
	101 10 102218.211	101 10 102219.021	101 10 102220.021	Black	Fixed Output
	101 10 102218.013	101 10 102219.013	101 10 102220.013	White	DALI
	101 10 102218.213	101 10 102219.023	101 10 102220.023	Black	DALI
	101 10 102218.015	101 10 102219.015	101 10 102220.015	White	Bluetooth
	101 10 102218.215	101 10 102219.025	101 10 102220.025	Black	Bluetooth
3000°K	101 10 102221.011	101 10 102222.011	101 10 102223.011	White	Fixed Output
	101 10 102221.211	101 10 102222.021	101 10 102223.021	Black	Fixed Output
	101 10 102221.013	101 10 102222.013	101 10 102223.013	White	DALI
	101 10 102221.213	101 10 102222.023	101 10 102223.023	Black	DALI
	101 10 102221.015	101 10 102222.015	101 10 102223.015	White	Bluetooth
	101 10 102221.215	101 10 102222.025	101 10 102223.025	Black	Bluetooth
4000°K	101 10 102224.011	101 10 102225.011	101 10 102226.011	White	Fixed Output
	101 10 102224.211	101 10 102225.021	101 10 102226.021	Black	Fixed Output
	101 10 102224.013	101 10 102225.013	101 10 102226.013	White	DALI
	101 10 102224.213	101 10 102225.023	101 10 102226.023	Black	DALI
	101 10 102224.015	101 10 102225.015	101 10 102226.015	White	Bluetooth
	101 10 102224.215	101 10 102225.025	101 10 102226.025	Black	Bluetooth

iilus.com