

Product Manual


Mono 100-150 Surface Downlighter Type 3



Mono 100-150 Surface Type 3




Surface mounted ceiling luminaire with rotationally symmetrical spot, flood or wide flood optics, high colour reproduction, fixed orientation. High pressure die-cast powdercoated facade with anti-glare snoot detail. Remote driver. Active power factor correction, current regulation, voltage spike protection.



System

Power	14W / 19W / 27W
Input	220V-240V / 50-60Hz
Colour Temperature	2700°K / 3000°K / 4000°K
Lumen Maintenance	14W 19W L90 B10 50 000hr / 27W L80 B20 50 000hr
CRI	Ra97
Tm30	R95 F103
Chromacity	<2 SDCM
Articulation	Fixed
Ingress Protection	IP44
Control	Remote (Included)

14W	SP - 15°	FL - 30°	WFL - 60°
2700°K	956lm	1013lm	981lm
3000°K	953lm	942lm	1037lm
4000°K	1127lm	1095lm	1132lm
19W	SP - 15°	FL - 30°	WFL - 60°
2700°K	1314lm	1300lm	1350lm
3000°K	1320lm	1300lm	1436lm
4000°K	1548lm	1508lm	1568lm
27W	SP - 15°	FL - 30°	WFL - 60°
2700°K	1763lm	1750lm	1765lm
3000°K	1781lm	1770lm	1939lm
4000°K	2091lm	2029lm	2110lm

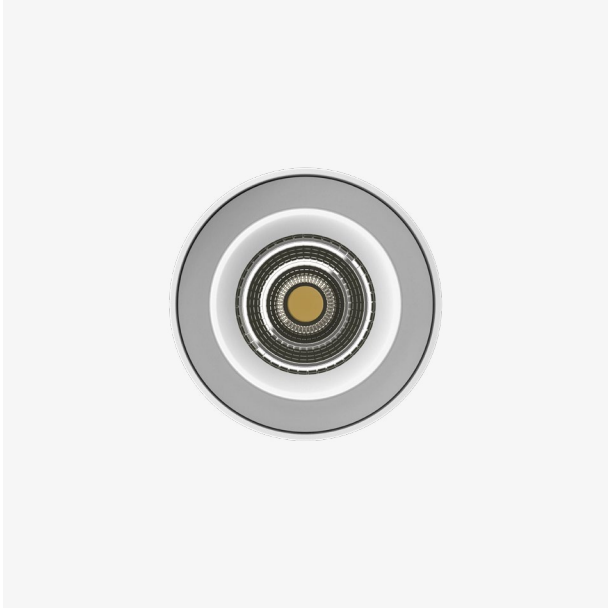





Model References

14W	SP - 15°	FL - 30°	WFL - 60°		
2700°K	101 10 102300.011	101 10 102301.011	101 10 102302.011	White	Fixed Output
	101 10 102300.211	101 10 102301.021	101 10 102302.021	Black	Fixed Output
	101 10 102300.012	101 10 102301.012	101 10 102302.012	White	Phase DIM
	101 10 102300.212	101 10 102301.022	101 10 102302.022	Black	Phase DIM
	101 10 102300.013	101 10 102301.013	101 10 102302.013	White	DALI
	101 10 102300.213	101 10 102301.023	101 10 102302.023	Black	DALI
	101 10 102300.015	101 10 102301.015	101 10 102302.015	White	Bluetooth
	101 10 102300.215	101 10 102301.025	101 10 102302.025	Black	Bluetooth
3000°K	101 10 102303.011	101 10 102304.011	101 10 102305.011	White	Fixed Output
	101 10 102303.211	101 10 102304.021	101 10 102305.021	Black	Fixed Output
	101 10 102303.012	101 10 102304.012	101 10 102305.012	White	Phase DIM
	101 10 102303.212	101 10 102304.022	101 10 102305.022	Black	Phase DIM
	101 10 102303.013	101 10 102304.013	101 10 102305.013	White	DALI
	101 10 102303.213	101 10 102304.023	101 10 102305.023	Black	DALI
	101 10 102303.015	101 10 102304.015	101 10 102305.015	White	Bluetooth
	101 10 102303.215	101 10 102304.025	101 10 102305.025	Black	Bluetooth
4000°K	101 10 102306.011	101 10 102307.011	101 10 102308.011	White	Fixed Output
	101 10 102306.211	101 10 102307.021	101 10 102308.021	Black	Fixed Output
	101 10 102306.012	101 10 102307.012	101 10 102308.012	White	Phase DIM
	101 10 102306.212	101 10 102307.022	101 10 102308.022	Black	Phase DIM
	101 10 102306.013	101 10 102307.013	101 10 102308.013	White	DALI
	101 10 102306.213	101 10 102307.023	101 10 102308.023	Black	DALI
	101 10 102306.015	101 10 102307.015	101 10 102308.015	White	Bluetooth
	101 10 102306.215	101 10 102307.025	101 10 102308.025	Black	Bluetooth

19W	FL - 15°	FL - 30°	WFL - 60°		
2700°K	101 10 102309.011	101 10 102310.011	101 10 102311.011	White	Fixed Output
	101 10 102309.211	101 10 102310.021	101 10 102311.021	Black	Fixed Output
	101 10 102309.012	101 10 102310.012	101 10 102311.012	White	Phase DIM
	101 10 102309.212	101 10 102310.022	101 10 102311.022	Black	Phase DIM
	101 10 102309.013	101 10 102310.013	101 10 102311.013	White	DALI
	101 10 102309.213	101 10 102310.023	101 10 102311.023	Black	DALI
	101 10 102309.015	101 10 102310.015	101 10 102311.015	White	Bluetooth
	101 10 102309.215	101 10 102310.025	101 10 102311.025	Black	Bluetooth
3000°K	101 10 102312.011	101 10 102313.011	101 10 102314.011	White	Fixed Output
	101 10 10232.211	101 10 102313.021	101 10 102314.021	Black	Fixed Output
	101 10 102312.012	101 10 102313.012	101 10 102314.012	White	Phase DIM
	101 10 10232.212	101 10 102313.022	101 10 102314.022	Black	Phase DIM
	101 10 102312.013	101 10 102313.013	101 10 102314.013	White	DALI
	101 10 102312.213	101 10 102313.023	101 10 102314.023	Black	DALI
	101 10 102312.015	101 10 102313.015	101 10 102314.015	White	Bluetooth
	101 10 102312.215	101 10 102313.025	101 10 102314.025	Black	Bluetooth
4000°K	101 10 102315.011	101 10 102316.011	101 10 102317.011	White	Fixed Output
	101 10 102315.211	101 10 102316.021	101 10 102317.021	Black	Fixed Output
	101 10 102315.012	101 10 102316.012	101 10 102317.012	White	Phase DIM
	101 10 102315.212	101 10 102316.022	101 10 102317.022	Black	Phase DIM
	101 10 102315.013	101 10 102316.013	101 10 102317.013	White	DALI
	101 10 102315.213	101 10 102316.023	101 10 102317.023	Black	DALI
	101 10 102315.015	101 10 102316.015	101 10 102317.015	White	Bluetooth
	101 10 102315.215	101 10 102316.025	101 10 102317.025	Black	Bluetooth

Model References

27W	SP - 15°	FL - 30°	WFL - 60°		
2700°K	101 10 102318.011	101 10 102319.011	101 10 102320.011	White	Fixed Output
	101 10 102318.211	101 10 102319.021	101 10 102320.021	Black	Fixed Output
	101 10 102318.013	101 10 102319.013	101 10 102320.013	White	DALI
	101 10 102318.213	101 10 102319.023	101 10 102320.023	Black	DALI
	101 10 102318.015	101 10 102319.015	101 10 102320.015	White	Bluetooth
	101 10 102318.215	101 10 102319.025	101 10 102320.025	Black	Bluetooth
3000°K	101 10 102321.011	101 10 102322.011	101 10 102323.011	White	Fixed Output
	101 10 102321.211	101 10 102322.021	101 10 102323.021	Black	Fixed Output
	101 10 102321.013	101 10 102322.013	101 10 102323.013	White	DALI
	101 10 102321.213	101 10 102322.023	101 10 102323.023	Black	DALI
	101 10 102321.015	101 10 102322.015	101 10 102323.015	White	Bluetooth
	101 10 102321.215	101 10 102322.025	101 10 102323.025	Black	Bluetooth
4000°K	101 10 102324.011	101 10 102325.011	101 10 102326.011	White	Fixed Output
	101 10 102324.211	101 10 102325.021	101 10 102326.021	Black	Fixed Output
	101 10 102324.013	101 10 102325.013	101 10 102326.013	White	DALI
	101 10 102324.213	101 10 102325.023	101 10 102326.023	Black	DALI
	101 10 102324.015	101 10 102325.015	101 10 102326.015	White	Bluetooth
	101 10 102324.215	101 10 102325.025	101 10 102326.025	Black	Bluetooth

iilus.com