

Product Manual

Mono 100 Suspension Downlighter Type 1




IILUS

Mono 100 Suspension Type 1




Suspension mounted ceiling luminaire with rotationally symmetrical spot, flood or wide flood optics, high colour reproduction, fixed orientation. High pressure die-cast powdercoated facade with inset detail. Integrated driver. Active power factor correction, current regulation, voltage spike protection. Optional spreader lens, linear spreader lens, diffuser lens, or hex louvre; factory fitted.

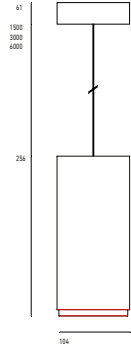

System

| | |
|---------------------------|---|
| Power | 14W / 19W / 27W |
| Input | 220V-240V / 50-60Hz |
| Colour Temperature | 2700°K / 3000°K / 4000°K |
| Lumen Maintenance | 14W 19W L90 B10 50 000hr / 27W L80 B20 50 000hr |
| CRI | Ra97 |
| Tm30 | R95 F103 |
| Chromacity | <3 SCDM |
| Articulation | Fixed |
| Ingress Protection | IP20 |

| 14W | SP - 15° | FL - 30° | WFL - 60° |
|--------|----------|----------|-----------|
| 2700°K | 956lm | 1013lm | 981lm |
| 3000°K | 953lm | 942lm | 1037lm |
| 4000°K | 1127lm | 1095lm | 1132lm |
| 19W | SP - 15° | FL - 30° | WFL - 60° |
| 2700°K | 1314lm | 1300lm | 1350lm |
| 3000°K | 1320lm | 1300lm | 1436lm |
| 4000°K | 1548lm | 1508lm | 1568lm |
| 27W | SP - 15° | FL - 30° | WFL - 60° |
| 2700°K | 1763lm | 1750lm | 1765lm |
| 3000°K | 1781lm | 1770lm | 1939lm |
| 4000°K | 2091lm | 2029lm | 2110lm |

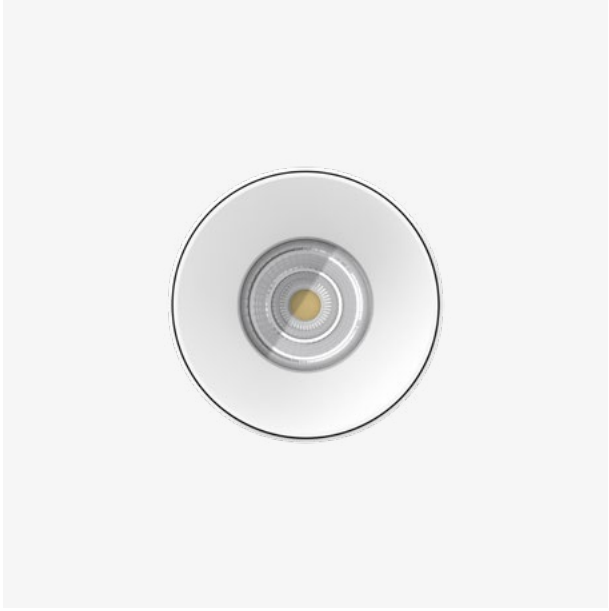

Model References

| 14W | SP - 15° | FL - 30° | WFL - 60° | | |
|---------------|-------------------|-------------------|-------------------|-------|--------------|
| 2700°K | 101 10 200100.011 | 101 10 200101.011 | 101 10 200102.011 | White | Fixed Output |
| | 101 10 200100.211 | 101 10 200101.021 | 101 10 200102.021 | Black | Fixed Output |
| | 101 10 200100.013 | 101 10 200101.013 | 101 10 200102.013 | White | DALI |
| | 101 10 200100.213 | 101 10 200101.023 | 101 10 200102.023 | Black | DALI |
| | 101 10 200100.015 | 101 10 200101.015 | 101 10 200102.015 | White | Bluetooth |
| | 101 10 200100.215 | 101 10 200101.025 | 101 10 200102.025 | Black | Bluetooth |
| 3000°K | 101 10 200103.011 | 101 10 200104.011 | 101 10 200105.011 | White | Fixed Output |
| | 101 10 200103.211 | 101 10 200104.021 | 101 10 200105.021 | Black | Fixed Output |
| | 101 10 200103.013 | 101 10 200104.013 | 101 10 200105.013 | White | DALI |
| | 101 10 200103.213 | 101 10 200104.023 | 101 10 200105.023 | Black | DALI |
| | 101 10 200103.015 | 101 10 200104.015 | 101 10 200105.015 | White | Bluetooth |
| | 101 10 200103.215 | 101 10 200104.025 | 101 10 200105.025 | Black | Bluetooth |
| 4000°K | 101 10 200106.011 | 101 10 200107.011 | 101 10 200108.011 | White | Fixed Output |
| | 101 10 200106.211 | 101 10 200107.021 | 101 10 200108.021 | Black | Fixed Output |
| | 101 10 200106.013 | 101 10 200107.013 | 101 10 200108.013 | White | DALI |
| | 101 10 200106.213 | 101 10 200107.023 | 101 10 200108.023 | Black | DALI |
| | 101 10 200106.015 | 101 10 200107.015 | 101 10 200108.015 | White | Bluetooth |
| | 101 10 200106.215 | 101 10 200107.025 | 101 10 200108.025 | Black | Bluetooth |
| 19W | FL - 15° | FL - 30° | WFL - 60° | | |
| 2700°K | 101 10 200109.011 | 101 10 200110.011 | 101 10 200111.011 | White | Fixed Output |
| | 101 10 200109.211 | 101 10 200110.021 | 101 10 200111.021 | Black | Fixed Output |
| | 101 10 200109.013 | 101 10 200110.013 | 101 10 200111.013 | White | DALI |
| | 101 10 200109.213 | 101 10 200110.023 | 101 10 200111.023 | Black | DALI |
| | 101 10 200109.015 | 101 10 200110.015 | 101 10 200111.015 | White | Bluetooth |
| | 101 10 200109.215 | 101 10 200110.025 | 101 10 200111.025 | Black | Bluetooth |
| 3000°K | 101 10 200112.011 | 101 10 200113.011 | 101 10 200114.011 | White | Fixed Output |
| | 101 10 20012.211 | 101 10 200113.021 | 101 10 200114.021 | Black | Fixed Output |
| | 101 10 200112.013 | 101 10 200113.013 | 101 10 200114.013 | White | DALI |
| | 101 10 200112.213 | 101 10 200113.023 | 101 10 200114.023 | Black | DALI |
| | 101 10 200112.015 | 101 10 200113.015 | 101 10 200114.015 | White | Bluetooth |
| | 101 10 200112.215 | 101 10 200113.025 | 101 10 200114.025 | Black | Bluetooth |
| 4000°K | 101 10 200115.011 | 101 10 200116.011 | 101 10 200117.011 | White | Fixed Output |
| | 101 10 200115.211 | 101 10 200116.021 | 101 10 200117.021 | Black | Fixed Output |
| | 101 10 200115.013 | 101 10 200116.013 | 101 10 200117.013 | White | DALI |
| | 101 10 200115.213 | 101 10 200116.023 | 101 10 200117.023 | Black | DALI |
| | 101 10 200115.015 | 101 10 200116.015 | 101 10 200117.015 | White | Bluetooth |
| | 101 10 200115.215 | 101 10 200116.025 | 101 10 200117.025 | Black | Bluetooth |

| 27W | SP - 15° | FL - 30° | WFL - 60° | | |
|--------|-------------------|-------------------|-------------------|-------|--------------|
| 2700°K | 101 10 200118.011 | 101 10 200119.011 | 101 10 200120.011 | White | Fixed Output |
| | 101 10 200118.211 | 101 10 200119.021 | 101 10 200120.021 | Black | Fixed Output |
| | 101 10 200118.013 | 101 10 200119.013 | 101 10 200120.013 | White | DALI |
| | 101 10 200118.213 | 101 10 200119.023 | 101 10 200120.023 | Black | DALI |
| | 101 10 200118.015 | 101 10 200119.015 | 101 10 200120.015 | White | Bluetooth |
| | 101 10 200118.215 | 101 10 200119.025 | 101 10 200120.025 | Black | Bluetooth |
| 3000°K | 101 10 200121.011 | 101 10 200122.011 | 101 10 200123.011 | White | Fixed Output |
| | 101 10 200121.211 | 101 10 200122.021 | 101 10 200123.021 | Black | Fixed Output |
| | 101 10 200121.013 | 101 10 200122.013 | 101 10 200123.013 | White | DALI |
| | 101 10 200121.213 | 101 10 200122.023 | 101 10 200123.023 | Black | DALI |
| | 101 10 200121.015 | 101 10 200122.015 | 101 10 200123.015 | White | Bluetooth |
| | 101 10 200121.215 | 101 10 200122.025 | 101 10 200123.025 | Black | Bluetooth |
| 4000°K | 101 10 200124.011 | 101 10 200125.011 | 101 10 200126.011 | White | Fixed Output |
| | 101 10 200124.211 | 101 10 200125.021 | 101 10 200126.021 | Black | Fixed Output |
| | 101 10 200124.013 | 101 10 200125.013 | 101 10 200126.013 | White | DALI |
| | 101 10 200124.213 | 101 10 200125.023 | 101 10 200126.023 | Black | DALI |
| | 101 10 200124.015 | 101 10 200125.015 | 101 10 200126.015 | White | Bluetooth |
| | 101 10 200124.215 | 101 10 200125.025 | 101 10 200126.025 | Black | Bluetooth |

Optical Accessories

| | |
|-------------------|------------------------------------|
| 990 00 006501.020 | Asymmetrical Lens A1 065 |
| 990 00 006502.000 | Asymmetrical Lens A2 065 |
| 990 00 006503.000 | Hex Louvre 065 |
| 990 00 006504.000 | Spreader Lens 065 |
| 990 00 006505.000 | Linear Spreader Lens 065 |
| 990 00 006506.000 | Diffuser Lens 80% Transmission 065 |
| 990 00 006507.000 | Diffuser Lens 50% Transmission 065 |
| 990 00 006508.000 | Low UGR Workplace Optic Lens 065 |

Mounting Accessories

| | |
|-------------------|--|
| 980 01 010015.003 | Suspension Kit 3 Core Clear Cable 1500mm |
| 980 01 010030.003 | Suspension Kit 3 Core Clear Cable 3000mm |
| 980 01 010060.003 | Suspension Kit 3 Core Clear Cable 6000mm |
| 980 01 010015.005 | Suspension Kit 5 Core Clear Cable 1500mm |
| 980 01 010030.005 | Suspension Kit 5 Core Clear Cable 3000mm |
| 980 01 010060.005 | Suspension Kit 5 Core Clear Cable 6000mm |

iilus.com