

Product Manual


Fade 100 Indirect Uplighter Type 1



Fade 100 Indirect Uplighter Type 1



Surface mounted wall luminaire with axially symmetrical indirect flood optics in fixed orientation. High pressure die-cast housing with nano-ceramic pre-treatment prior to polyester powdercoating, IP65. Remote driver. Active power factor correction, current regulation, voltage spike protection.





System

Power	3W
Input	24V-DC
Colour Temperature	2700°K / 3000°K
CRI	Ra80
Chromacity	<3 SCDM
Articulation	Fixed
Ingress Protection	IP65

Colour Temperature	Part Number	Product Name	Finish	Control
2700°K	102 10 500100.010	Fade 100 Indirect Uplighter 2700K	White	Control Excluded
	102 10 500100.011	Fade 100 Indirect Uplighter 2700K	White	Fixed Output
	102 10 500100.012	Fade 100 Indirect Uplighter 2700K	White	Phase DIM
	102 10 500100.013	Fade 100 Indirect Uplighter 2700K	White	DALI
3000°K	102 10 500101.010	Fade 100 Indirect Uplighter 3000K	White	Control Excluded
	102 10 500101.011	Fade 100 Indirect Uplighter 3000K	White	Fixed Output
	102 10 500101.012	Fade 100 Indirect Uplighter 3000K	White	Phase DIM
	102 10 500101.013	Fade 100 Indirect Uplighter 3000K	White	DALI

Remote Drivers

Part Number	Driver Description	No. of Fixtures	Control
981 00 201600.011	CC-CV LED Driver 16W 24V IP20 Fixed Output P1	1	Fixed Output
981 00 103500.011	CV LED Driver 35W 24V IP20 Fixed Output P1	3	Fixed Output
981 00 202000.012	CC-CV LED Driver 20W 24V IP20 Phase DIM P1	1	Phase DIM
981 00 103000.012	CV LED Driver 30W 24V IP20 Phase DIM P1	2	Phase DIM
981 00 202000.013	CC-CV LED Driver 20W 24V IP20 DALI P1	1	DALI
981 00 103500.003	CV LED Driver 35W 24V DALI	3	DALI

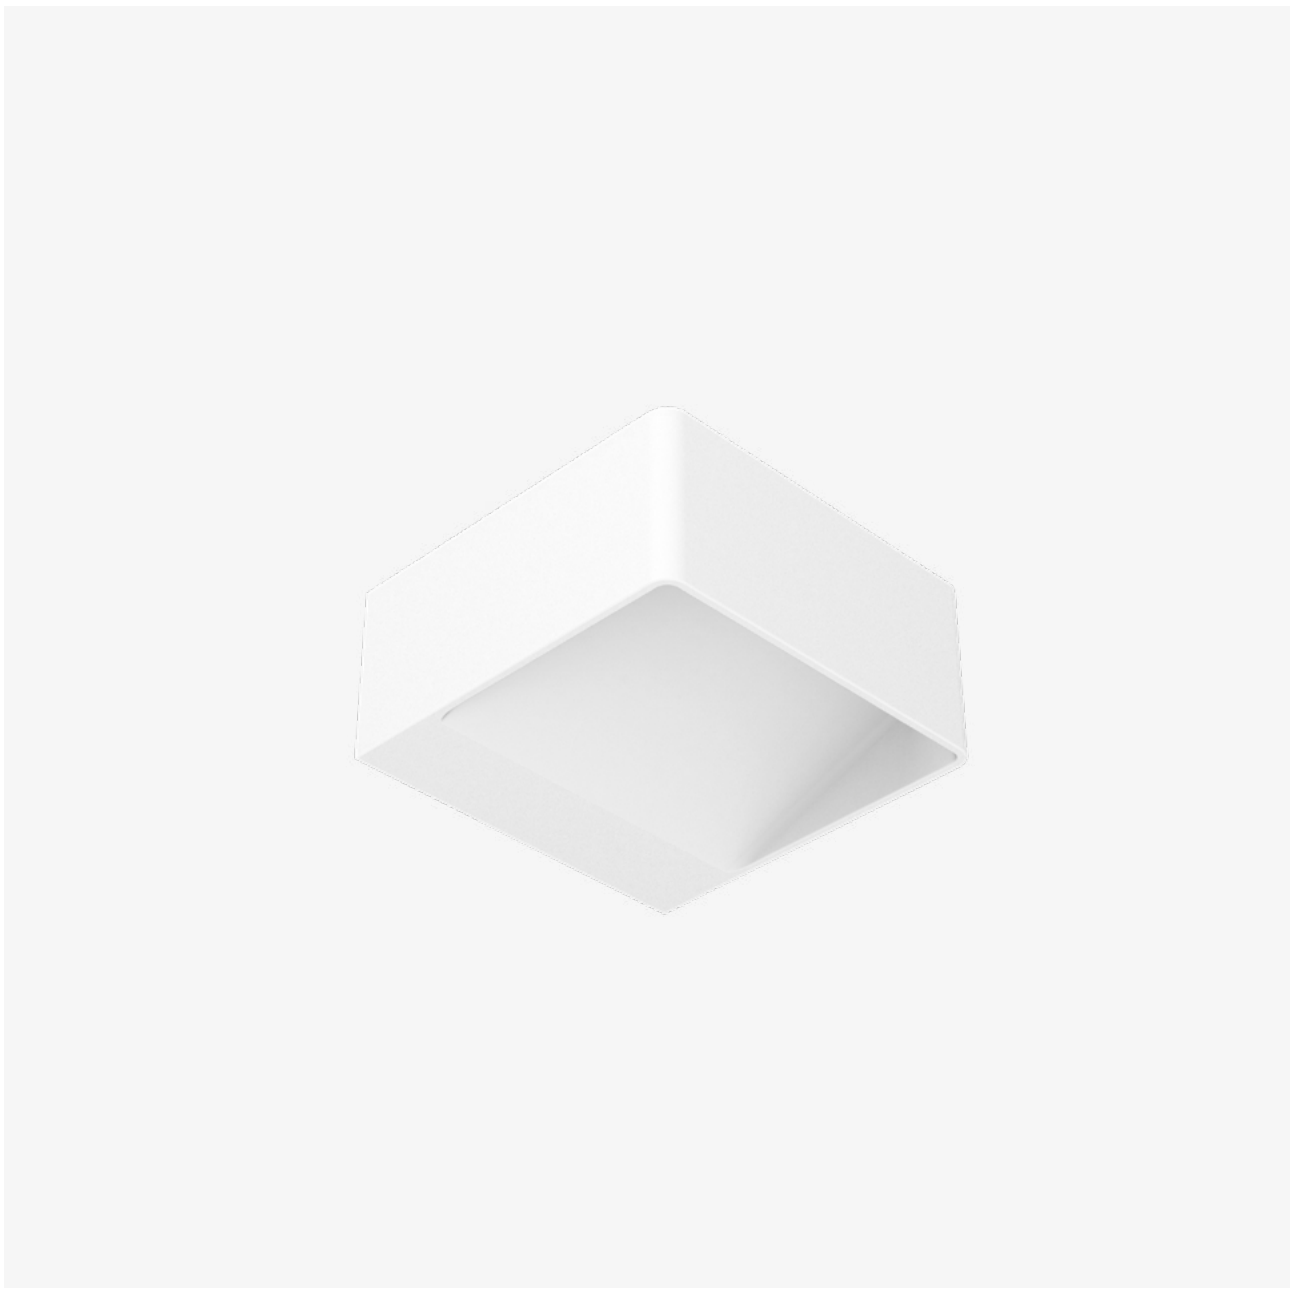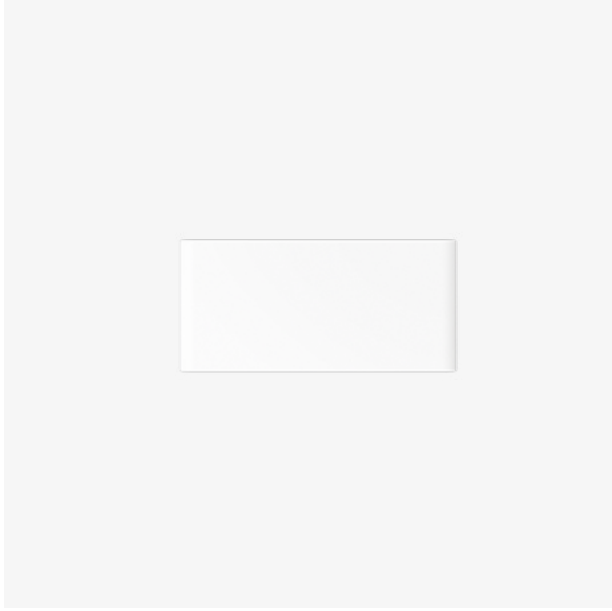

iilus.com