

Product Manual

Accent 100 IP Directional Type 3



IILUS

Accent 100 IP Directional Type 3





Recessed ceiling luminaire with rotationally symmetrical flood or wide flood optics, high colour reproduction, directional orientation, adjustable depth mechanism for optical assembly. Combine with optical lens and anti-glare accessories for oval, wide spread, or diffuse beam control. High pressure die-cast powdercoated facade with snoot detail. Includes direct fast connector to remote driver. Active power factor correction, current regulation, voltage spike protection.

System

Power	8W / 7W / 14W
Current	180mA / 350mA
Colour Temperature	2700°K / 3000°K / 4000°K / 2700-1800°K Dim to Warm
Lumen Maintenance	L90 B10 50 000hr
CRI	Ra97
Tm30	R95 F103
Chromacity	<2 SCDM
Articulation	355° Rotation / 0-30° Tilt
Cut-Out	92mm Round x 115-135mm (7W/8W) / 155-175mm (14W) Depth
Ingress Protection	IP44

		FL - 25°	MFL - 40°	WFL - 60°
8W	2700°K	576lm	626lm	624lm
	3000°K	642lm	680lm	672lm
	4000°K	610lm	615lm	650lm
7W	2700-1800°K	454lm	493lm	492lm
14W	2700°K	874lm	863lm	882lm
	3000°K	952lm	931lm	965lm
	4000°K	1044lm	1020lm	1049lm








Accent IP

Directional Type 3

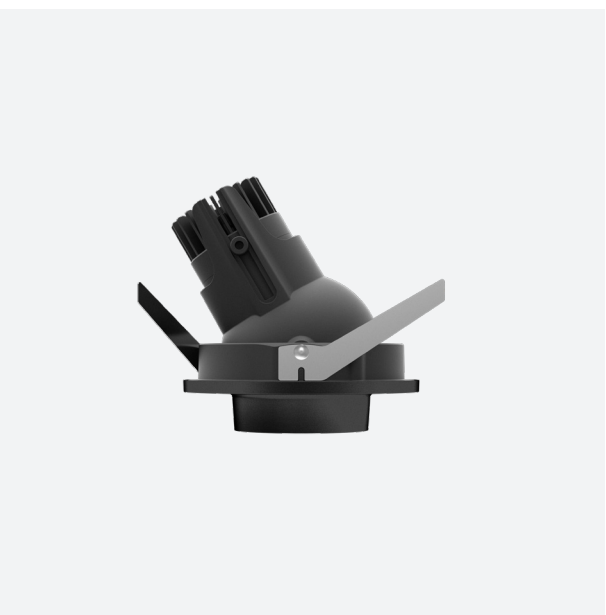

Page — 04

Model References

	FL - 25°	MFL - 40°	WFL - 60°			
8W 2700°K	100 10 007300.011	100 10 007301.011	100 10 007302.011	○	White	Fixed Output
	100 10 007300.021	100 10 007301.021	100 10 007302.021	●	Black	Fixed Output
	100 10 007300.012	100 10 007301.012	100 10 007302.012	○	White	Phase DIM
	100 10 007300.022	100 10 007301.022	100 10 007302.022	●	Black	Phase DIM
	100 10 007300.013	100 10 007301.013	100 10 007302.013	○	White	DALI
	100 10 007300.023	100 10 007301.023	100 10 007302.023	●	Black	DALI
8W 3000°K	100 10 007303.011	100 10 007304.011	100 10 007305.011	○	White	Fixed Output
	100 10 007303.021	100 10 007304.021	100 10 007305.021	●	Black	Fixed Output
	100 10 007303.012	100 10 007304.012	100 10 007305.012	○	White	Phase DIM
	100 10 007303.022	100 10 007304.022	100 10 007305.022	●	Black	Phase DIM
	100 10 007303.013	100 10 007304.013	100 10 007305.013	○	White	DALI
	100 10 007303.023	100 10 007304.023	100 10 007305.023	●	Black	DALI
8W 4000°K	100 10 007306.011	100 10 007307.011	100 10 007308.011	○	White	Fixed Output
	100 10 007306.021	100 10 007307.021	100 10 007308.021	●	Black	Fixed Output
	100 10 007306.012	100 10 007307.012	100 10 007308.012	○	White	Phase DIM
	100 10 007306.022	100 10 007307.022	100 10 007308.022	●	Black	Phase DIM
	100 10 007306.013	100 10 007307.013	100 10 007308.013	○	White	DALI
	100 10 007306.023	100 10 007307.023	100 10 007308.023	●	Black	DALI
7W 2700-1800°K	100 10 007309.011	100 10 007310.011	100 10 007311.011	○	White	Fixed Output
	100 10 007309.021	100 10 007310.021	100 10 007311.021	●	Black	Fixed Output
	100 10 007309.012	100 10 007310.012	100 10 007311.012	○	White	Phase DIM
	100 10 007309.022	100 10 007310.022	100 10 007311.022	●	Black	Phase DIM
	100 10 007309.013	100 10 007310.013	100 10 007311.013	○	White	DALI
	100 10 007309.023	100 10 007310.023	100 10 007311.023	●	Black	DALI
14W 2700°K	100 10 007312.011	100 10 007313.011	100 10 007314.011	○	White	Fixed Output
	100 10 007312.021	100 10 007313.021	100 10 007314.021	●	Black	Fixed Output
	100 10 007312.012	100 10 007313.012	100 10 007314.012	○	White	Phase DIM
	100 10 007312.022	100 10 007313.022	100 10 007314.022	●	Black	Phase DIM
	100 10 007312.013	100 10 007313.013	100 10 007314.013	○	White	DALI
	100 10 007312.023	100 10 007313.023	100 10 007314.023	●	Black	DALI
14W 3000°K	100 10 007315.011	100 10 007316.011	100 10 007317.011	○	White	Fixed Output
	100 10 007315.021	100 10 007316.021	100 10 007317.021	●	Black	Fixed Output
	100 10 007315.012	100 10 007316.012	100 10 007317.012	○	White	Phase DIM
	100 10 007315.022	100 10 007316.022	100 10 007317.022	●	Black	Phase DIM
	100 10 007315.013	100 10 007316.013	100 10 007317.013	○	White	DALI
	100 10 007315.023	100 10 007316.023	100 10 007317.023	●	Black	DALI
14W 4000°K	100 10 007318.011	100 10 007319.011	100 10 007320.011	○	White	Fixed Output
	100 10 007318.021	100 10 007319.021	100 10 007320.021	●	Black	Fixed Output
	100 10 007318.012	100 10 007319.012	100 10 007320.012	○	White	Phase DIM
	100 10 007318.022	100 10 007319.022	100 10 007320.022	●	Black	Phase DIM
	100 10 007318.013	100 10 007319.013	100 10 007320.013	○	White	DALI
	100 10 007318.023	100 10 007319.023	100 10 007320.023	●	Black	DALI
Accessories	980 00 004301.010	Hex Louvre 043				
	980 00 004302.000	Spreader Lens 043				
	980 00 004303.000	Linear Spreader Lens 043				
	980 00 004304.000	Diffuser Lens 043				

iilus.com