

Product Manual

Accent 100 Trimless Concrete Directional Type 2



Accent 100 Trimless Concrete

Directional Type 2





Recessed ceiling luminaire for use in concrete slab with rotationally symmetrical flood or wide flood optics, high colour reproduction, directional orientation, adjustable depth mechanism for optical assembly. Combine with optical lens and anti-glare accessories for oval, wide spread, or diffuse beam control. High pressure die-cast powdercoated facade with rounded detail. Includes direct fast connector to remote driver. Active power factor correction, current regulation, voltage spike protection.

System

Power	8W / 7W / 14W
Current	180mA / 350mA
Colour Temperature	2700°K / 3000°K / 4000°K / 2700-1800°K Dim to Warm
Lumen Maintenance	L90 B10 50 000hr
CRI	Ra97
Tm30	R95 F103
Chromacity	<2 SCDM
Articulation	355° Rotation / 30° Tilt
Cut-Out	182mm Round x 125-190mm Depth
Ingress Protection	IP20

		FL - 25°	MFL - 40°	WFL - 60°
8W	2700°K	576lm	626lm	624lm
	3000°K	642lm	680lm	672lm
	4000°K	610lm	615lm	650lm
7W	2700-1800°K	454lm	493lm	492lm
14W	2700°K	874lm	863lm	882lm
	3000°K	952lm	931lm	965lm
	4000°K	1044lm	1020lm	1049lm



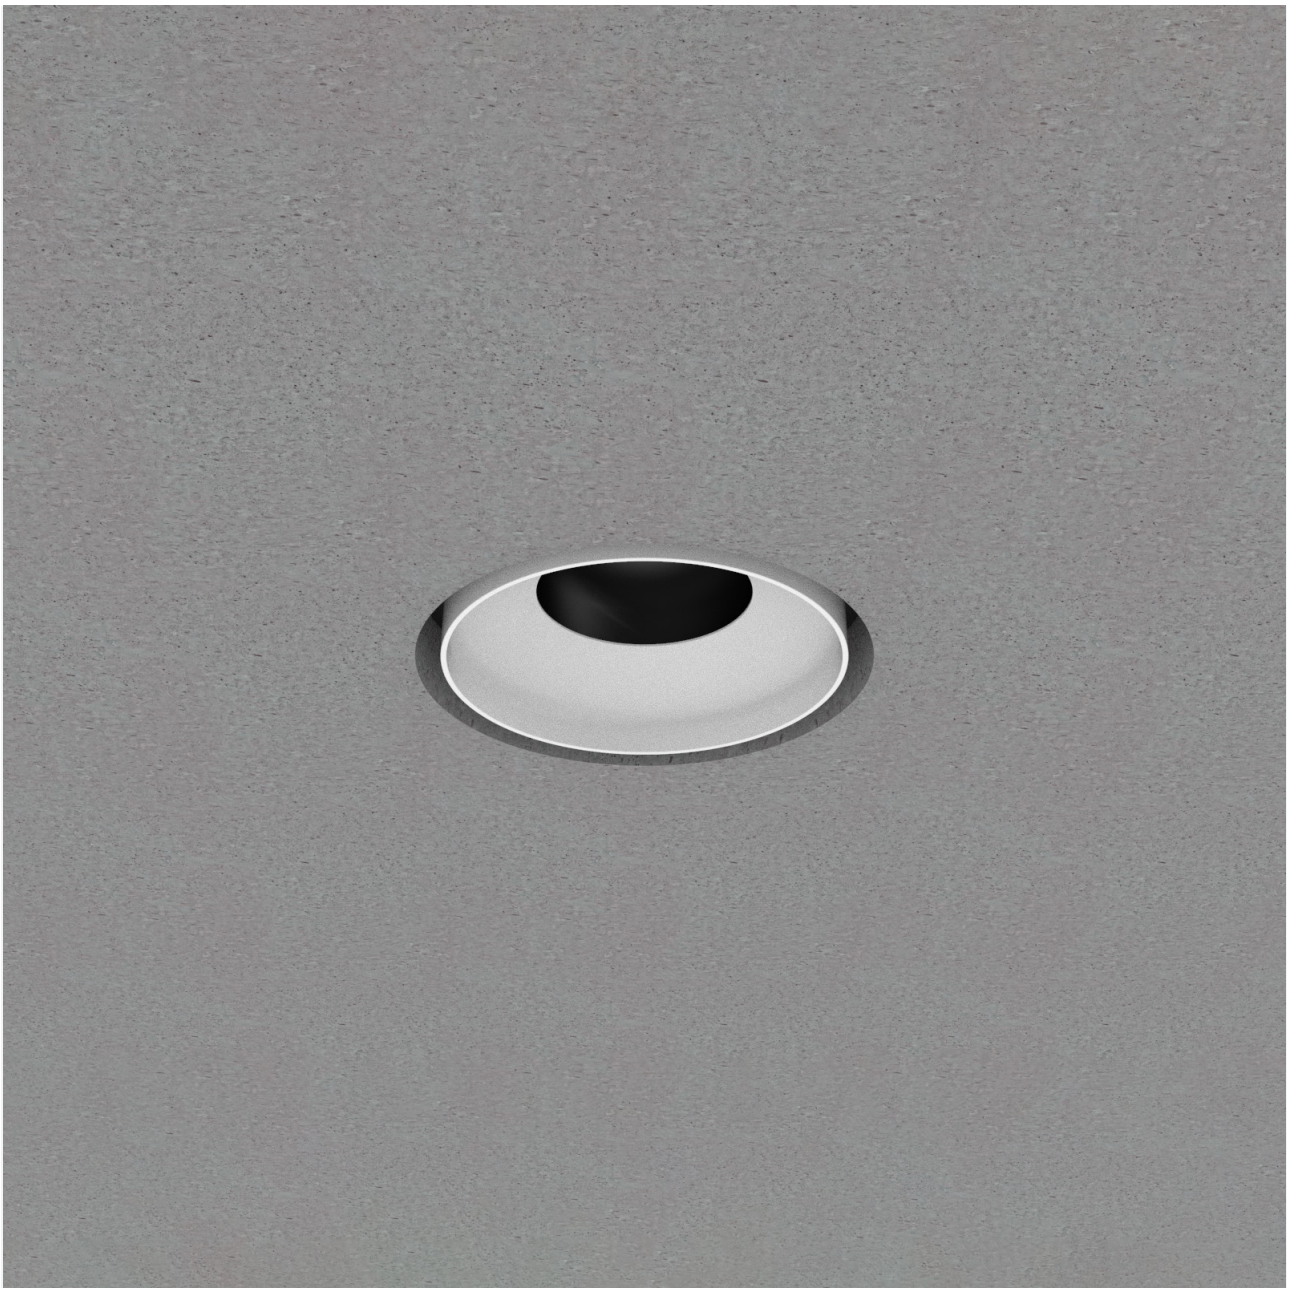



Accent 100 Trimless Concrete

Directional Type 2

	FL - 25°	MFL - 40°	WFL - 60°			
8W 2700°K	100 10 013200.011	100 10 013201.011	100 10 013202.011	○	White	Fixed Output
	100 10 013200.021	100 10 013201.021	100 10 013202.021	●	Black	Fixed Output
	100 10 013200.012	100 10 013201.012	100 10 013202.012	○	White	Phase DIM
	100 10 013200.022	100 10 013201.022	100 10 013202.022	●	Black	Phase DIM
	100 10 013200.013	100 10 013201.013	100 10 013202.013	○	White	DALI
	100 10 013200.023	100 10 013201.023	100 10 013202.023	●	Black	DALI
8W 3000°K	100 10 013203.011	100 10 013204.011	100 10 013205.011	○	White	Fixed Output
	100 10 013203.021	100 10 013204.021	100 10 013205.021	●	Black	Fixed Output
	100 10 013203.012	100 10 013204.012	100 10 013205.012	○	White	Phase DIM
	100 10 013203.022	100 10 013204.022	100 10 013205.022	●	Black	Phase DIM
	100 10 013203.013	100 10 013204.013	100 10 013205.013	○	White	DALI
	100 10 013203.023	100 10 013204.023	100 10 013205.023	●	Black	DALI
8W 4000°K	100 10 013206.011	100 10 013207.011	100 10 013208.011	○	White	Fixed Output
	100 10 013206.021	100 10 013207.021	100 10 013208.021	●	Black	Fixed Output
	100 10 013206.012	100 10 013207.012	100 10 013208.012	○	White	Phase DIM
	100 10 013206.022	100 10 013207.022	100 10 013208.022	●	Black	Phase DIM
	100 10 013206.013	100 10 013207.013	100 10 013208.013	○	White	DALI
	100 10 013206.023	100 10 013207.023	100 10 013208.023	●	Black	DALI
7W 2700-1800°K	100 10 013209.011	100 10 013210.011	100 10 013211.011	○	White	Fixed Output
	100 10 013209.021	100 10 013210.021	100 10 013211.021	●	Black	Fixed Output
	100 10 013209.012	100 10 013210.012	100 10 013211.012	○	White	Phase DIM
	100 10 013209.022	100 10 013210.022	100 10 013211.022	●	Black	Phase DIM
	100 10 013209.013	100 10 013210.013	100 10 013211.013	○	White	DALI
	100 10 013209.023	100 10 013210.023	100 10 013211.023	●	Black	DALI
14W 2700°K	100 10 013212.011	100 10 013213.011	100 10 013214.011	○	White	Fixed Output
	100 10 013212.021	100 10 013213.021	100 10 013214.021	●	Black	Fixed Output
	100 10 013212.012	100 10 013213.012	100 10 013214.012	○	White	Phase DIM
	100 10 013212.022	100 10 013213.022	100 10 013214.022	●	Black	Phase DIM
	100 10 013212.013	100 10 013213.013	100 10 013214.013	○	White	DALI
	100 10 013212.023	100 10 013213.023	100 10 013214.023	●	Black	DALI
14W 3000°K	100 10 013215.011	100 10 013216.011	100 10 013217.011	○	White	Fixed Output
	100 10 013215.021	100 10 013216.021	100 10 013217.021	●	Black	Fixed Output
	100 10 013215.012	100 10 013216.012	100 10 013217.012	○	White	Phase DIM
	100 10 013215.022	100 10 013216.022	100 10 013217.022	●	Black	Phase DIM
	100 10 013215.013	100 10 013216.013	100 10 013217.013	○	White	DALI
	100 10 013215.023	100 10 013216.023	100 10 013217.023	●	Black	DALI
14W 4000°K	100 10 013218.011	100 10 013219.011	100 10 013220.011	○	White	Fixed Output
	100 10 013218.021	100 10 013219.021	100 10 013220.021	●	Black	Fixed Output
	100 10 013218.012	100 10 013219.012	100 10 013220.012	○	White	Phase DIM
	100 10 013218.022	100 10 013219.022	100 10 013220.022	●	Black	Phase DIM
	100 10 013218.013	100 10 013219.013	100 10 013220.013	○	White	DALI
	100 10 013218.023	100 10 013219.023	100 10 013220.023	●	Black	DALI
Accessories	980 00 004301.010	Hex Louvre 043				
	980 00 004302.000	Spreader Lens 043				
	980 00 004303.000	Linear Spreader Lens 043				
	980 00 004304.000	Diffuser Lens 043				

iilus.com