

# Product Manual

Mono 100 Trimless Recessed Downlighter  
Type 2




# Mono 100 Trimless Type 2



Recessed ceiling luminaire with rotationally symmetrical spot, flood or wide flood optics, high colour reproduction, fixed orientation. High pressure die-cast powdercoated facade with trimless anti-glare baffle detail. Includes direct fast connector to remote driver. Active power factor correction, current regulation, voltage spike protection. Optional spreader lens, linear spreader lens, diffuser lens, or hex louvre; factory fitted.

140 - 150



178



**System**


<b>Power</b>	14W / 19W / 27W
<b>Input</b>	220V-240V / 50-60Hz
<b>Colour Temperature</b>	2700°K / 3000°K / 4000°K
<b>Lumen Maintenance</b>	L90 B10 50 000hr
<b>CRI</b>	Ra97
<b>Tm30</b>	R95 F103
<b>Chromacity</b>	<3 SCDM
<b>Articulation</b>	Fixed
<b>Ingress Protection</b>	IP20

14W	SP - 15°	FL - 30°	WFL - 60°
2700°K	956lm	1013lm	981lm
3000°K	953lm	942lm	1037lm
4000°K	1127lm	1095lm	1132lm

19W	SP - 15°	FL - 30°	WFL - 60°
2700°K	1314lm	1300lm	1350lm
3000°K	1320lm	1300lm	1436lm
4000°K	1548lm	1508lm	1568lm

27W	SP - 15°	FL - 30°	WFL - 60°
2700°K	1763lm	1750lm	1765lm
3000°K	1781lm	1770lm	1939lm
4000°K	2091lm	2029lm	2110lm

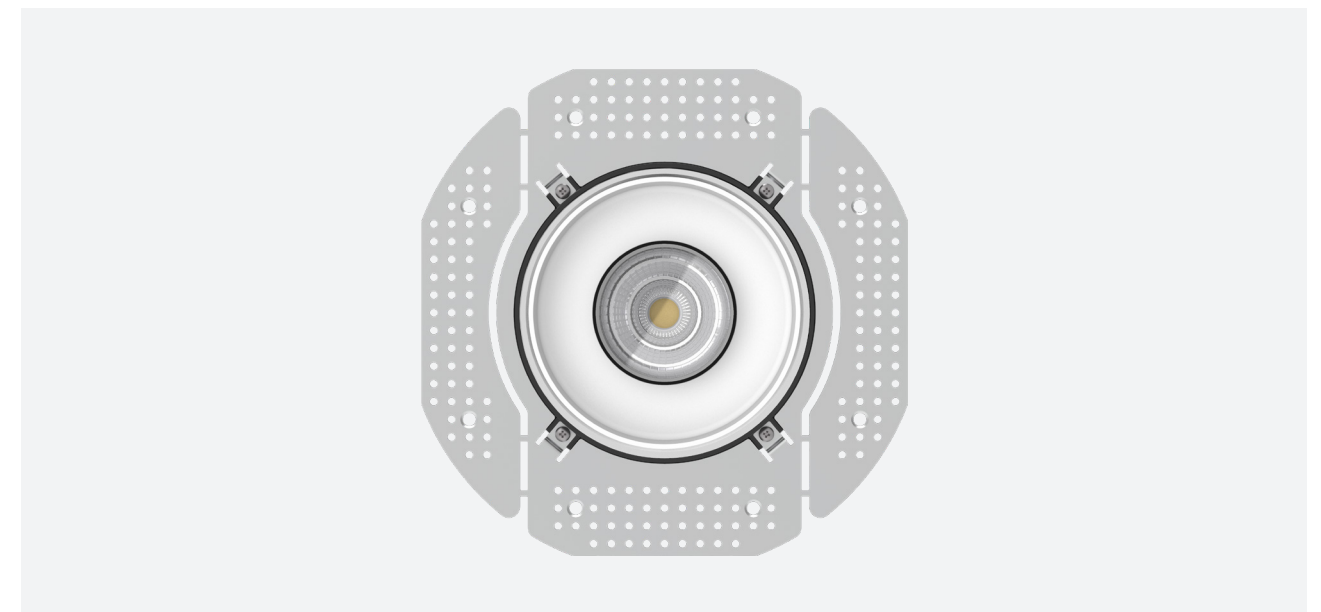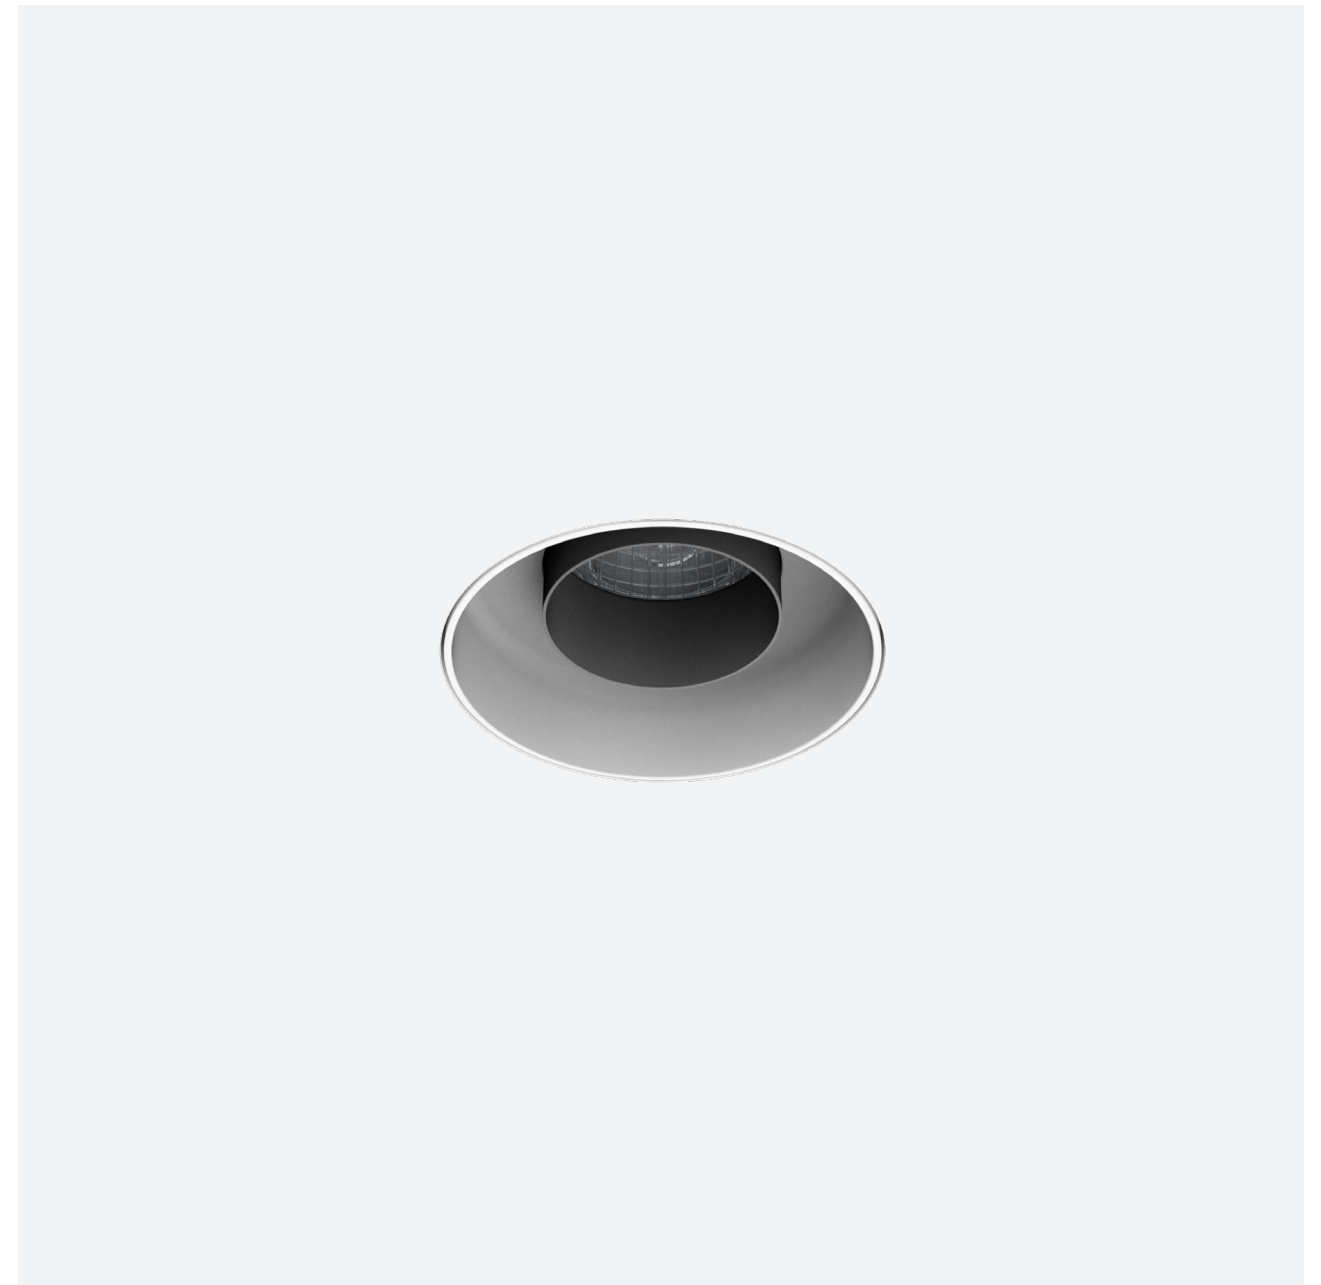

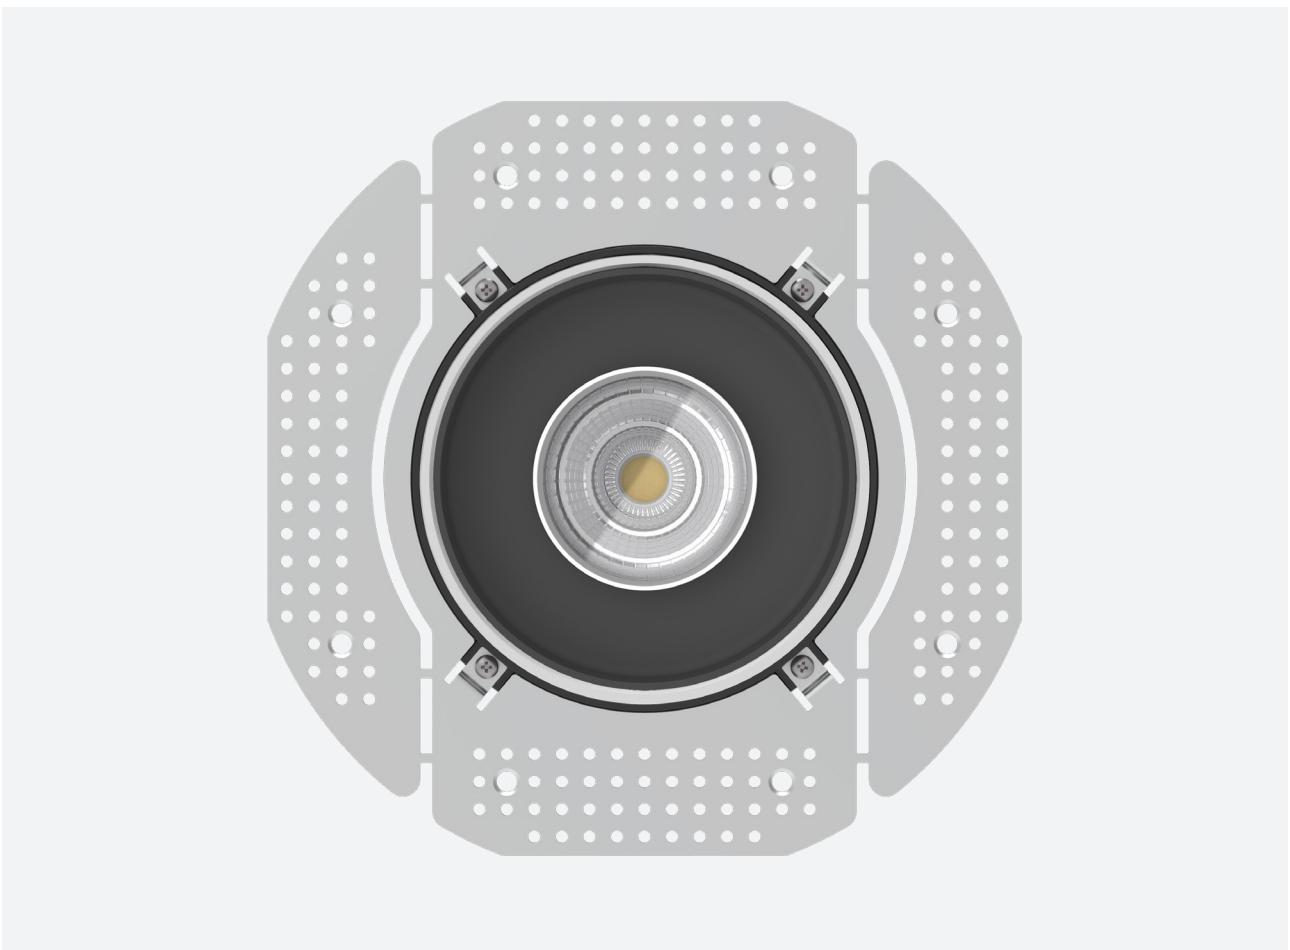

# Model References

14W	SP - 15°	FL - 30°	WFL - 60°		
<b>2700°K</b>	101 10 002200.011	101 10 002201.011	101 10 002202.011	White	Fixed Output
	101 10 002200.211	101 10 002201.021	101 10 002202.021	Black	Fixed Output
	101 10 002200.012	101 10 002201.012	101 10 002202.012	White	Phase DIM
	101 10 002200.212	101 10 002201.022	101 10 002202.022	Black	Phase DIM
	101 10 002200.013	101 10 002201.013	101 10 002202.013	White	DALI
	101 10 002200.213	101 10 002201.023	101 10 002202.023	Black	DALI
	101 10 002200.015	101 10 002201.015	101 10 002202.015	White	Bluetooth
	101 10 002200.215	101 10 002201.025	101 10 002202.025	Black	Bluetooth
<b>3000°K</b>	101 10 002203.011	101 10 002204.011	101 10 002205.011	White	Fixed Output
	101 10 002203.211	101 10 002204.021	101 10 002205.021	Black	Fixed Output
	101 10 002203.012	101 10 002204.012	101 10 002205.012	White	Phase DIM
	101 10 002203.212	101 10 002204.022	101 10 002205.022	Black	Phase DIM
	101 10 002203.013	101 10 002204.013	101 10 002205.013	White	DALI
	101 10 002203.213	101 10 002204.023	101 10 002205.023	Black	DALI
	101 10 002203.015	101 10 002204.015	101 10 002205.015	White	Bluetooth
	101 10 002203.215	101 10 002204.025	101 10 002205.025	Black	Bluetooth
<b>4000°K</b>	101 10 002206.011	101 10 002207.011	101 10 002208.011	White	Fixed Output
	101 10 002206.211	101 10 002207.021	101 10 002208.021	Black	Fixed Output
	101 10 002206.012	101 10 002207.012	101 10 002208.012	White	Phase DIM
	101 10 002206.212	101 10 002207.022	101 10 002208.022	Black	Phase DIM
	101 10 002206.013	101 10 002207.013	101 10 002208.013	White	DALI
	101 10 002206.213	101 10 002207.023	101 10 002208.023	Black	DALI
	101 10 002206.015	101 10 002207.015	101 10 002208.015	White	Bluetooth
	101 10 002206.215	101 10 002207.025	101 10 002208.025	Black	Bluetooth

19W	SP - 15°	FL - 30°	WFL - 60°		
<b>2700°K</b>	101 10 002209.011	101 10 002210.011	101 10 002211.011	White	Fixed Output
	101 10 002209.211	101 10 002210.021	101 10 002211.021	Black	Fixed Output
	101 10 002209.012	101 10 002210.012	101 10 002211.012	White	Phase DIM
	101 10 002209.212	101 10 002210.022	101 10 002211.022	Black	Phase DIM
	101 10 002209.013	101 10 002210.013	101 10 002211.013	White	DALI
	101 10 002209.213	101 10 002210.023	101 10 002211.023	Black	DALI
	101 10 002209.015	101 10 002210.015	101 10 002211.015	White	Bluetooth
	101 10 002209.215	101 10 002210.025	101 10 002211.025	Black	Bluetooth
<b>3000°K</b>	101 10 002212.011	101 10 002213.011	101 10 002214.011	White	Fixed Output
	101 10 002212.211	101 10 002213.021	101 10 002214.021	Black	Fixed Output
	101 10 002212.012	101 10 002213.012	101 10 002214.012	White	Phase DIM
	101 10 002212.212	101 10 002213.022	101 10 002214.022	Black	Phase DIM
	101 10 002212.013	101 10 002213.013	101 10 002214.013	White	DALI
	101 10 002212.213	101 10 002213.023	101 10 002214.023	Black	DALI
	101 10 002212.015	101 10 002213.015	101 10 002214.015	White	Bluetooth
	101 10 002212.215	101 10 002213.025	101 10 002214.025	Black	Bluetooth
<b>4000°K</b>	101 10 002215.011	101 10 002216.011	101 10 002217.011	White	Fixed Output
	101 10 002215.211	101 10 002216.021	101 10 002217.021	Black	Fixed Output
	101 10 002215.012	101 10 002216.012	101 10 002217.012	White	Phase DIM
	101 10 002215.212	101 10 002216.022	101 10 002217.022	Black	Phase DIM
	101 10 002215.013	101 10 002216.013	101 10 002217.013	White	DALI
	101 10 002215.213	101 10 002216.023	101 10 002217.023	Black	DALI
	101 10 002215.015	101 10 002216.015	101 10 002217.015	White	Bluetooth
	101 10 002215.215	101 10 002216.025	101 10 002217.025	Black	Bluetooth

# Model References

27W	SP - 15°	FL - 30°	WFL - 60°		
2700°K	101 10 002218.011	101 10 002219.011	101 10 002220.011	White	Fixed Output
	101 10 002218.211	101 10 002219.021	101 10 002220.021	Black	Fixed Output
	101 10 002218.012	101 10 002219.012	101 10 002220.012	White	Phase DIM
	101 10 002218.212	101 10 002219.022	101 10 002220.022	Black	Phase DIM
	101 10 002218.013	101 10 002219.013	101 10 002220.013	White	DALI
	101 10 002218.213	101 10 002219.023	101 10 002220.023	Black	DALI
	101 10 002218.015	101 10 002219.015	101 10 002220.015	White	Bluetooth
	101 10 002218.215	101 10 002219.025	101 10 002220.025	Black	Bluetooth
3000°K	101 10 002221.011	101 10 002222.011	101 10 002223.011	White	Fixed Output
	101 10 002221.211	101 10 002222.021	101 10 002223.021	Black	Fixed Output
	101 10 002221.012	101 10 002222.012	101 10 002223.012	White	Phase DIM
	101 10 002221.212	101 10 002222.022	101 10 002223.022	Black	Phase DIM
	101 10 002221.013	101 10 002222.013	101 10 002223.013	White	DALI
	101 10 002221.213	101 10 002222.023	101 10 002223.023	Black	DALI
	101 10 002221.015	101 10 002222.015	101 10 002223.015	White	Bluetooth
	101 10 002221.215	101 10 002222.025	101 10 002223.025	Black	Bluetooth
4000°K	101 10 002224.011	101 10 002225.011	101 10 002226.011	White	Fixed Output
	101 10 002224.211	101 10 002225.021	101 10 002226.021	Black	Fixed Output
	101 10 002224.012	101 10 002225.012	101 10 002226.012	White	Phase DIM
	101 10 002224.212	101 10 002225.022	101 10 002226.022	Black	Phase DIM
	101 10 002224.013	101 10 002225.013	101 10 002226.013	White	DALI
	101 10 002224.213	101 10 002225.023	101 10 002226.023	Black	DALI
	101 10 002224.015	101 10 002225.015	101 10 002226.015	White	Bluetooth
	101 10 002224.215	101 10 002225.025	101 10 002226.025	Black	Bluetooth

## Optical Accessories

990 00 006501.020	Asymmetrical Lens A1 065
990 00 006502.000	Asymmetrical Lens A2 065
990 00 006503.000	Hex Louvre 065
990 00 006504.000	Spreader Lens 065
990 00 006505.000	Linear Spreader Lens 065
990 00 006506.000	Diffuser Lens 80% Transmission 065
990 00 006507.000	Diffuser Lens 50% Transmission 065
990 00 006508.000	Low UGR Workplace Optic Lens 065